

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

# (12) UK Patent Application

(19) GB (11) 2 250 625 A

(43) Date of A publication 10.06.1992

(21) Application No 9124240.4

(22) Date of filing 14.11.1991

(30) Priority data

(31) 02306019

(32) 14.11.1990

(33) JP

(71) Applicant

Asahi Kogaku Kogyo Kabushiki Kaisha

(Incorporated in Japan)

2-36-9, Maenochi 2-chome, Itabashi-ku, Tokyo, Japan

(72) Inventors

Yoshiaki Sato

Yoshio Wakui

Kimiaki Ogawa

(74) Agent and/or Address for Service

Ablett Associates

2 Tile Kiln Lane, Highgate, London, N6 5LG,

United Kingdom

(51) INT CL<sup>5</sup>

G11B 27/28

(52) UK CL (Edition K)

G5R RB347 RB401 RB789 RHX

U1S S2222

(56) Documents cited

GB 2235846 A

GB 2235605 A

GB 2223645 A

EP 0223423 A1

EP 0127033 A1

(58) Field of search

UK CL (Edition K) G5R RAC RB35 RGC RHC RHX,

H4F FAA FDC FDX


INT CL<sup>5</sup> G11B

Online databases: WPI, INSPEC

## (54) Recording method of still video apparatus

(57) A recording method of an electronic still video apparatus in which when an image releasing operation is effected, the image signals are picked up and recorded on a recording medium and when a sound receipt operation starts, the sound signals are received for a predetermined time, so that the received sound signals are recorded on the recording medium when a sound releasing operation is effected, the still video apparatus having an AV record mode in which the image signals and the sound signals are recorded on the recording medium to correspond to each other, wherein the method includes recording the image signals prior to the sound signals regardless of the receipt of the sound signals in the AV record mode when the image release operation is effected.

FIG. 6

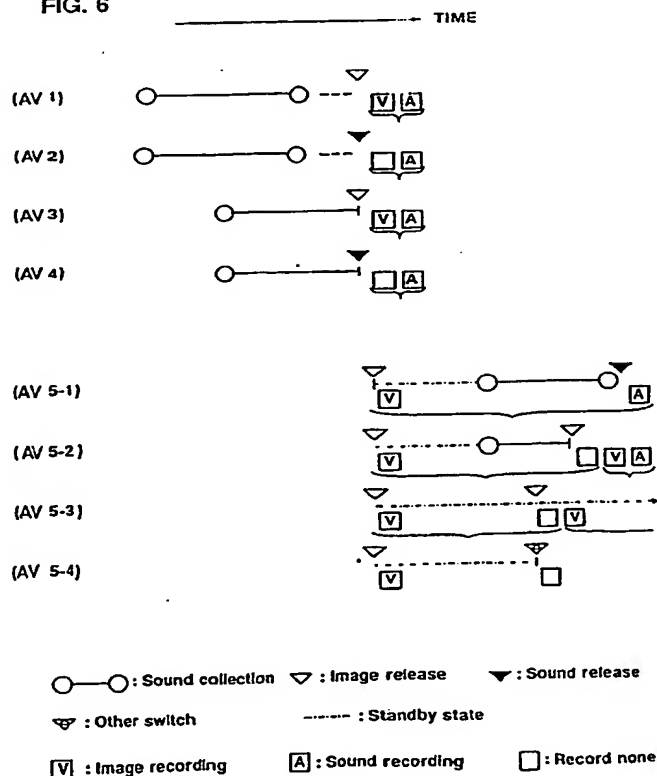

GB 2 250 625 A

FIG. 1

The diagram illustrates a video camera system (FIG. 1) and a sound adaptor (FIG. 2). The video camera system includes a 10 Strobe light emission unit, a 3 Zoom lens, a 5 Image sensor, a 6 Strobe light control circuit, a 7 Image pickup circuit, a 8 Monitor terminal, a 9 Image/Sound selection switch, a 11 Image sensor, a 12 Magnetic disc, a 13 Spindle motor, a 14 Spindle driving circuit, a 15 Magnetic head, a 16 Head driving circuit, a 17PG coil, a 18a and 18b Image/Sound selection switch, a 19 FM modulation circuit, a 20 FM demodulation circuit, a 21 FM demodulation circuit, a 22 FM demodulation circuit, a 23 System controller, a 24 Monitor detector, a 25 Adapter detector, a 26 Notch detector, a 27 System controller, a 28 Mode Up Wide Srobe 36 Image release, a 29 System controller, a 30 System controller, a 31 System controller, a 32 System controller, a 33 System controller, a 34 System controller, a 35 System controller, a 36 System controller, a 37 LCD panel, a 38 System controller, a 39 System controller, a 40 Microphone, a 41 Sound signal processing circuit, a 42 Sound signal processing circuit, a 43 Sound signal processing circuit, a 44 A/D converter, a 45 RAM, a 46 D/A converter, a 47 Digital signal processing circuit, a 48 Sound signal processing circuit, a 49 Compressed sound recording & processing circuit, a 50 Sound signal processing circuit, a 51 System controller, a 52 Sound receipt starting, a 53 Sound cancelling, a 54 Sound release, a 55 Recording time changing, a 56 LCD panel, and a 57 System controller.

The sound adaptor (FIG. 2) includes a 100 Sound signal processing circuit, a 101 Sound signal processing circuit, a 102 Sound signal processing circuit, a 103 Sound signal processing circuit, a 104 Sound signal processing circuit, a 105 Sound signal processing circuit, a 106 Sound signal processing circuit, a 107 Sound signal processing circuit, a 108 Sound signal processing circuit, a 109 Sound signal processing circuit, a 110 Sound signal processing circuit, a 111 Sound signal processing circuit, a 112 Sound signal processing circuit, a 113 Sound signal processing circuit, a 114 Sound signal processing circuit, a 115 Sound signal processing circuit, a 116 Sound signal processing circuit, a 117 Sound signal processing circuit, a 118 Sound signal processing circuit, a 119 Sound signal processing circuit, a 120 Sound signal processing circuit, a 121 Sound signal processing circuit, a 122 Sound signal processing circuit, a 123 Sound signal processing circuit, a 124 Sound signal processing circuit, a 125 Sound signal processing circuit, a 126 Sound signal processing circuit, a 127 Sound signal processing circuit, a 128 Sound signal processing circuit, a 129 Sound signal processing circuit, a 130 Sound signal processing circuit, a 131 Sound signal processing circuit, a 132 Sound signal processing circuit, a 133 Sound signal processing circuit, a 134 Sound signal processing circuit, a 135 Sound signal processing circuit, a 136 Sound signal processing circuit, a 137 Sound signal processing circuit, a 138 Sound signal processing circuit, a 139 Sound signal processing circuit, a 140 Sound signal processing circuit, a 141 Sound signal processing circuit, a 142 Sound signal processing circuit, a 143 Sound signal processing circuit, a 144 Sound signal processing circuit, a 145 Sound signal processing circuit, a 146 Sound signal processing circuit, a 147 Sound signal processing circuit, a 148 Sound signal processing circuit, a 149 Sound signal processing circuit, a 150 Sound signal processing circuit, a 151 Sound signal processing circuit, a 152 Sound signal processing circuit, a 153 Sound signal processing circuit, a 154 Sound signal processing circuit, a 155 Sound signal processing circuit, a 156 Sound signal processing circuit, a 157 Sound signal processing circuit, a 158 Sound signal processing circuit, a 159 Sound signal processing circuit, a 160 Sound signal processing circuit, a 161 Sound signal processing circuit, a 162 Sound signal processing circuit, a 163 Sound signal processing circuit, a 164 Sound signal processing circuit, a 165 Sound signal processing circuit, a 166 Sound signal processing circuit, a 167 Sound signal processing circuit, a 168 Sound signal processing circuit, a 169 Sound signal processing circuit, a 170 Sound signal processing circuit, a 171 Sound signal processing circuit, a 172 Sound signal processing circuit, a 173 Sound signal processing circuit, a 174 Sound signal processing circuit, a 175 Sound signal processing circuit, a 176 Sound signal processing circuit, a 177 Sound signal processing circuit, a 178 Sound signal processing circuit, a 179 Sound signal processing circuit, a 180 Sound signal processing circuit, a 181 Sound signal processing circuit, a 182 Sound signal processing circuit, a 183 Sound signal processing circuit, a 184 Sound signal processing circuit, a 185 Sound signal processing circuit, a 186 Sound signal processing circuit, a 187 Sound signal processing circuit, a 188 Sound signal processing circuit, a 189 Sound signal processing circuit, a 190 Sound signal processing circuit, a 191 Sound signal processing circuit, a 192 Sound signal processing circuit, a 193 Sound signal processing circuit, a 194 Sound signal processing circuit, a 195 Sound signal processing circuit, a 196 Sound signal processing circuit, a 197 Sound signal processing circuit, a 198 Sound signal processing circuit, a 199 Sound signal processing circuit, and a 200 Sound adaptor.

FIG. 2

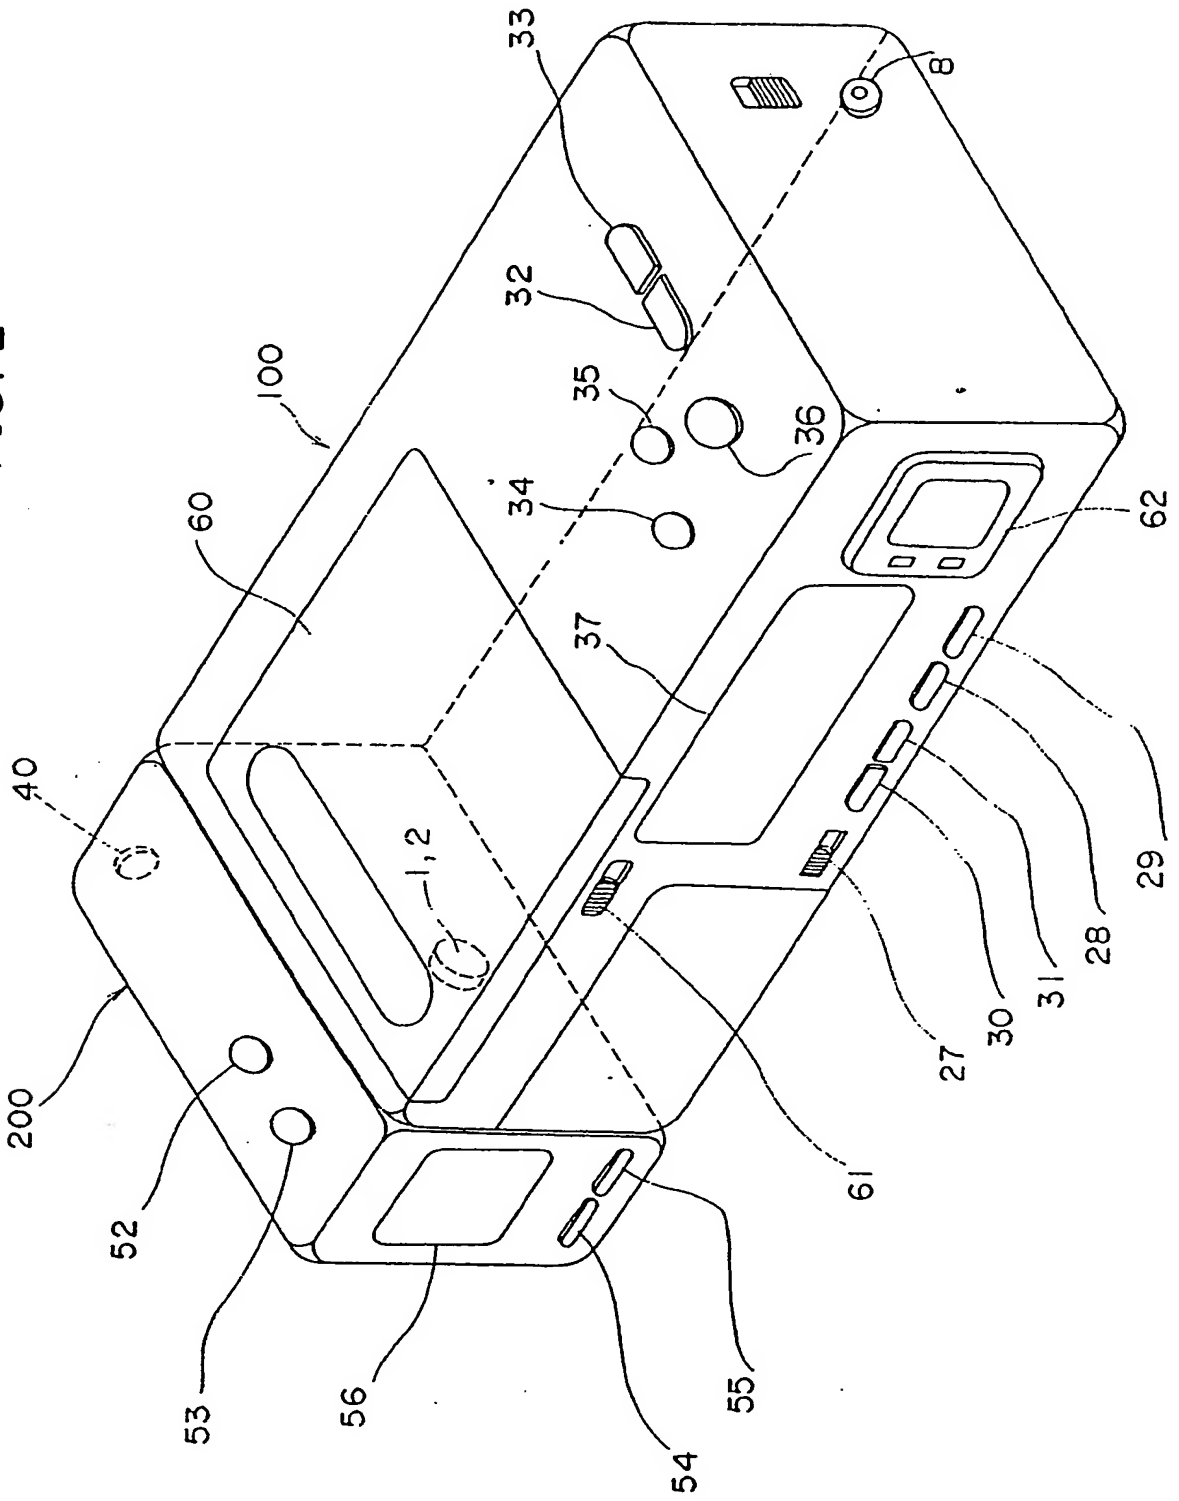


FIG. 3A

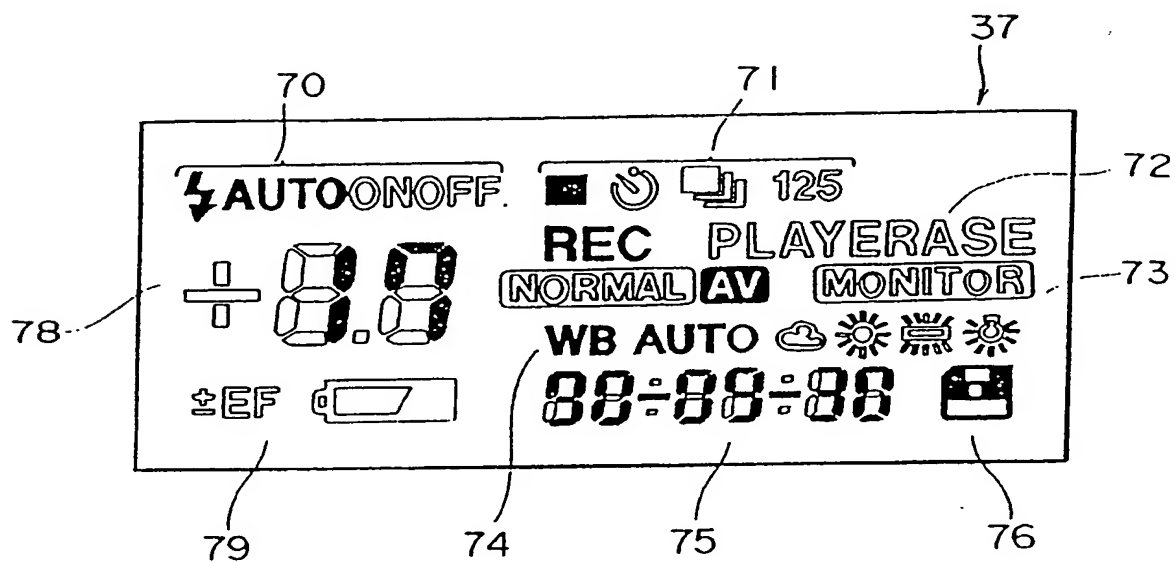


FIG. 3B

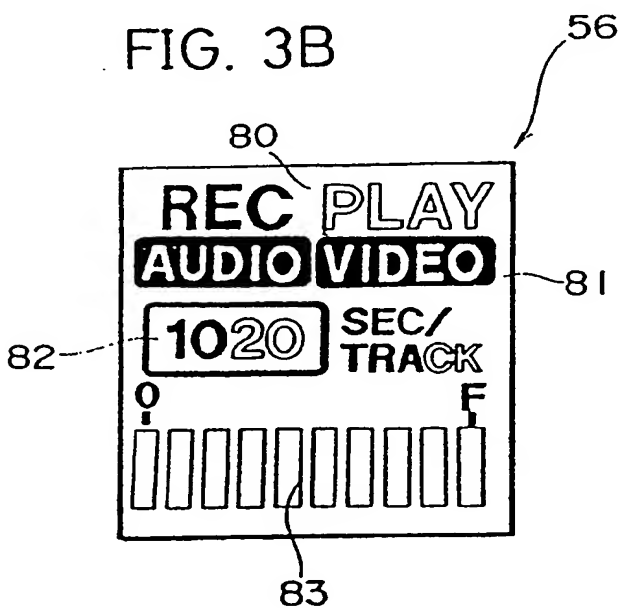


FIG. 4A

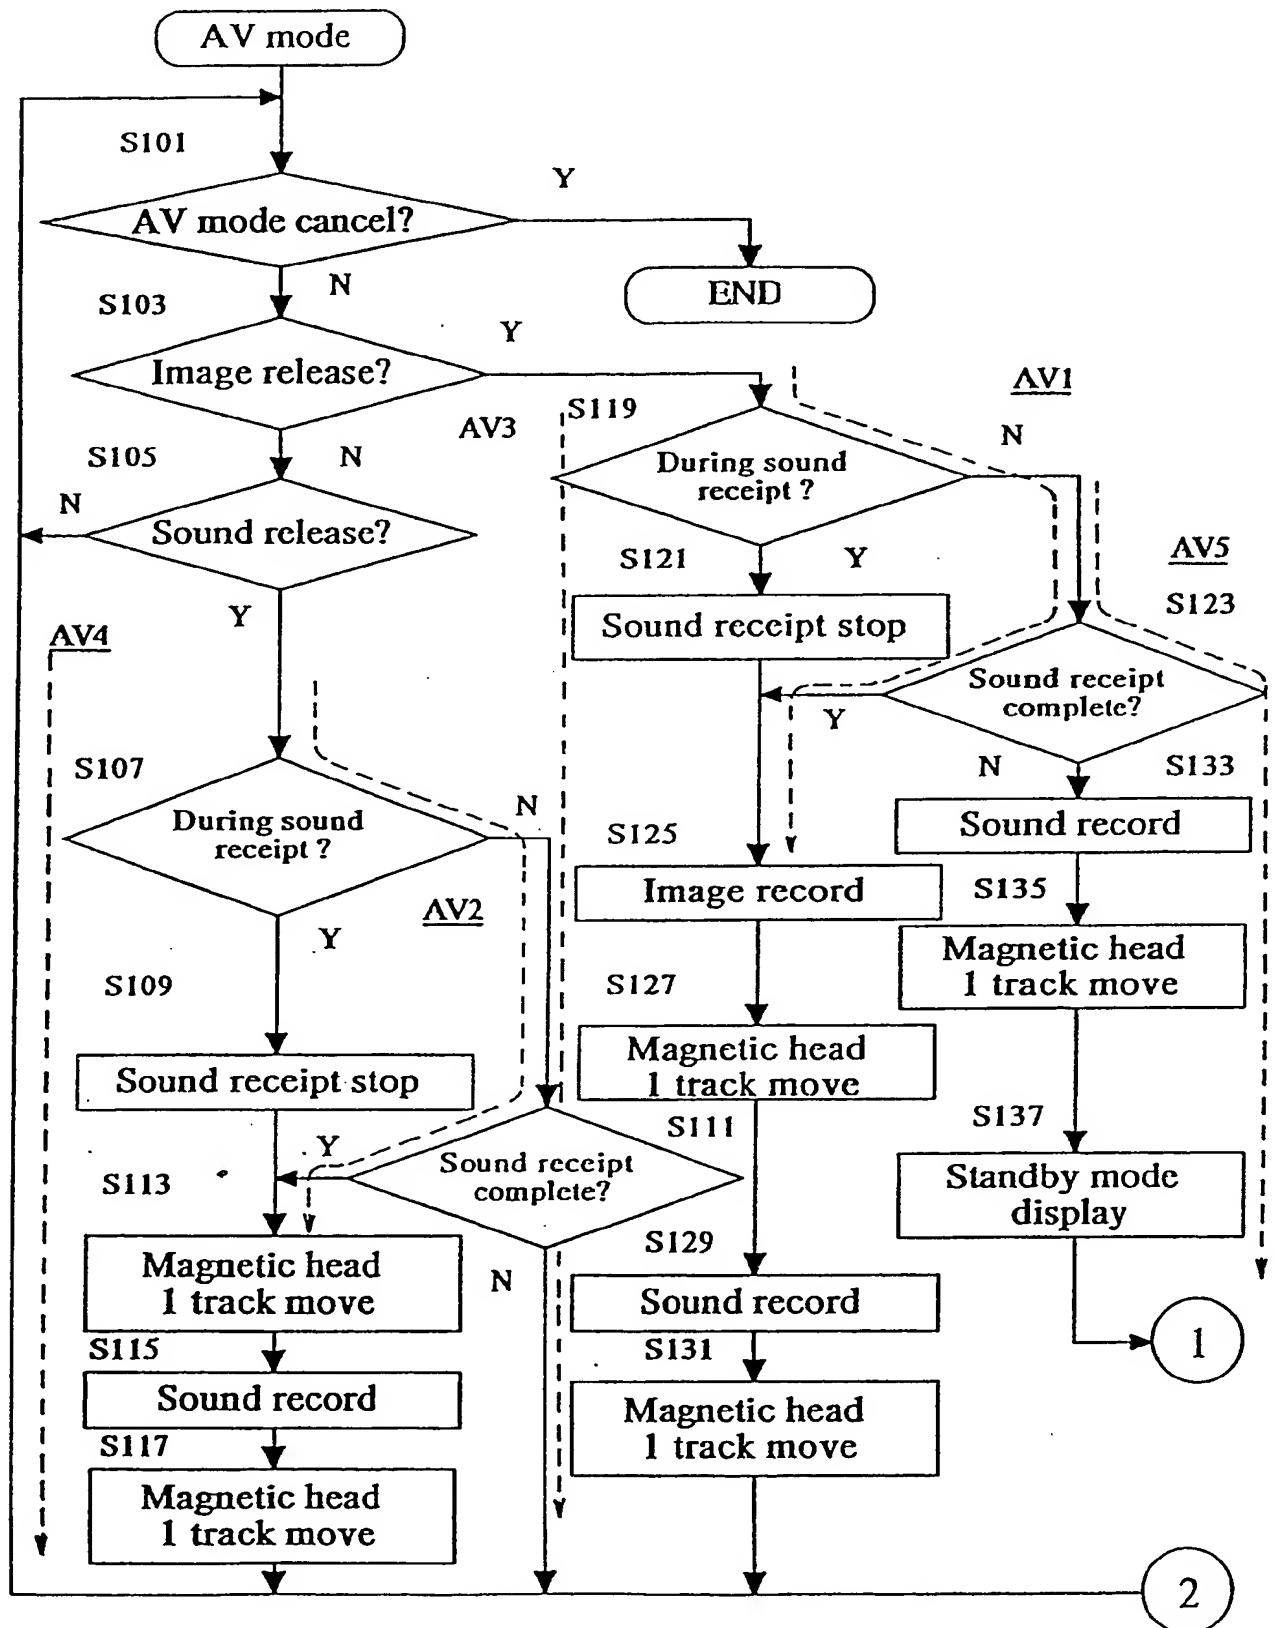


FIG. 4B

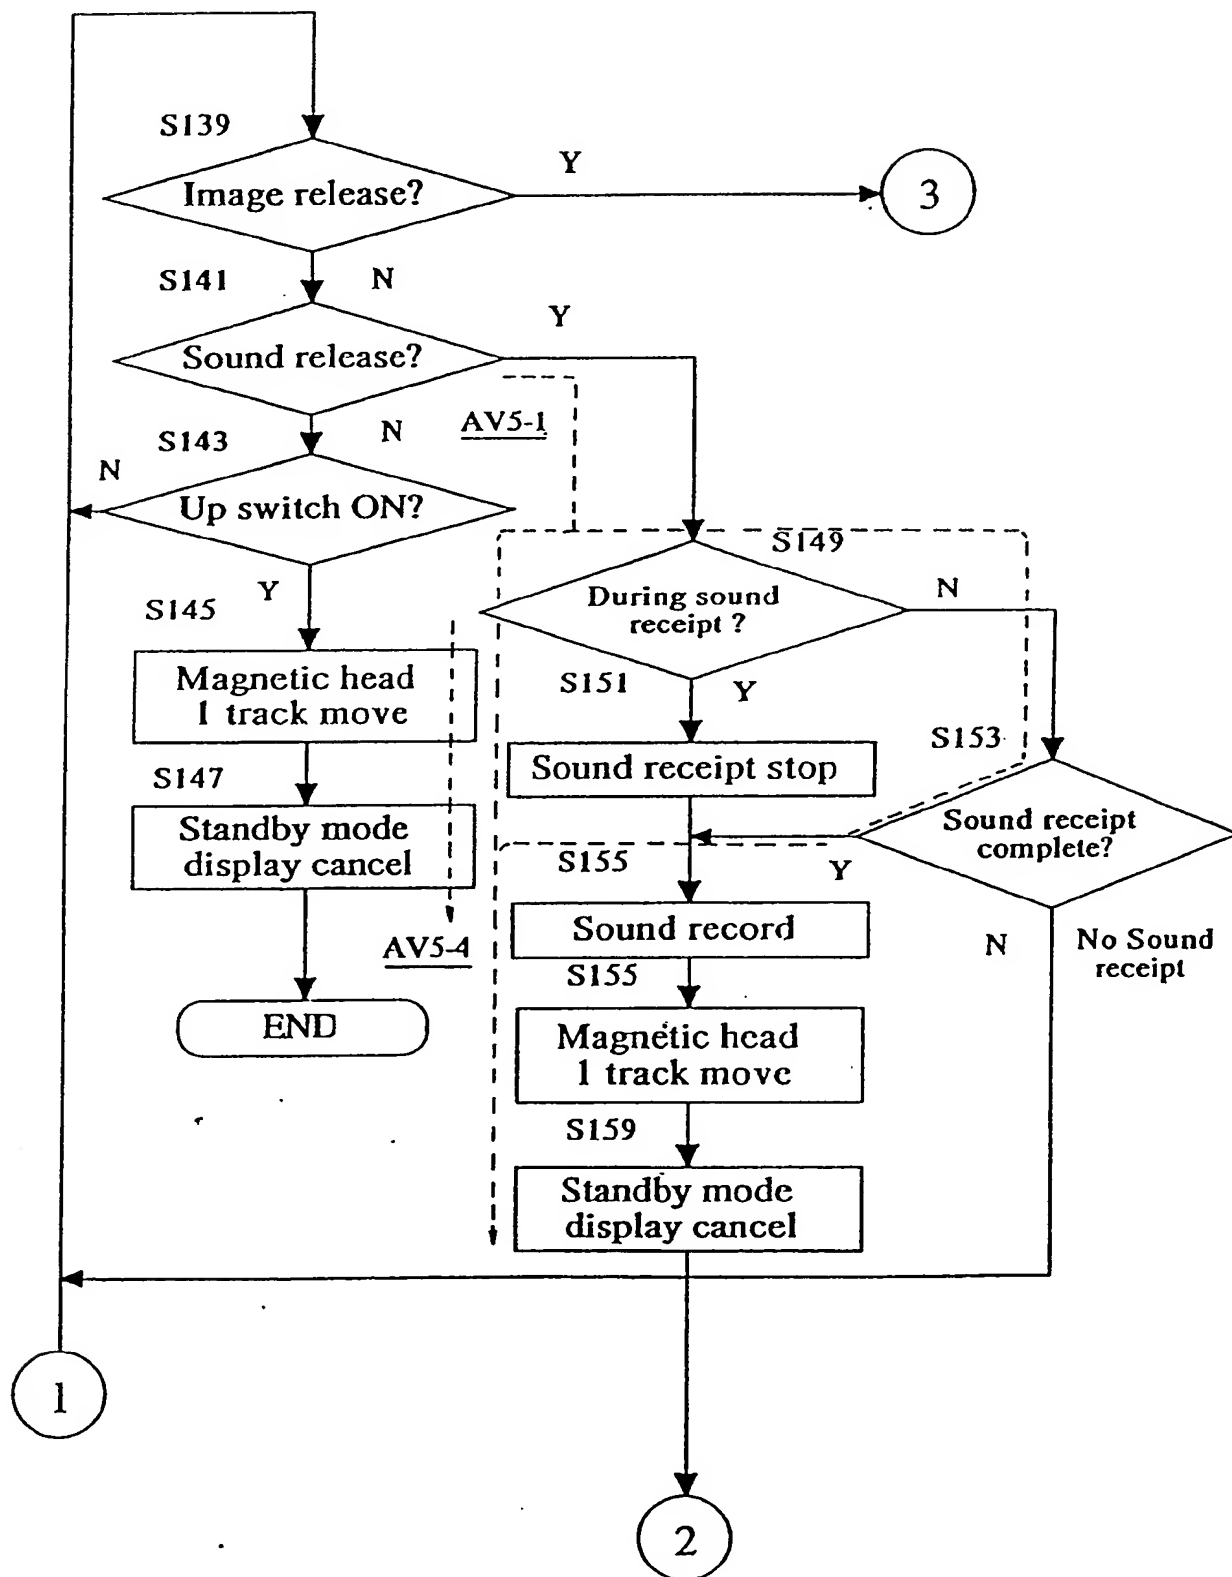




FIG. 4C

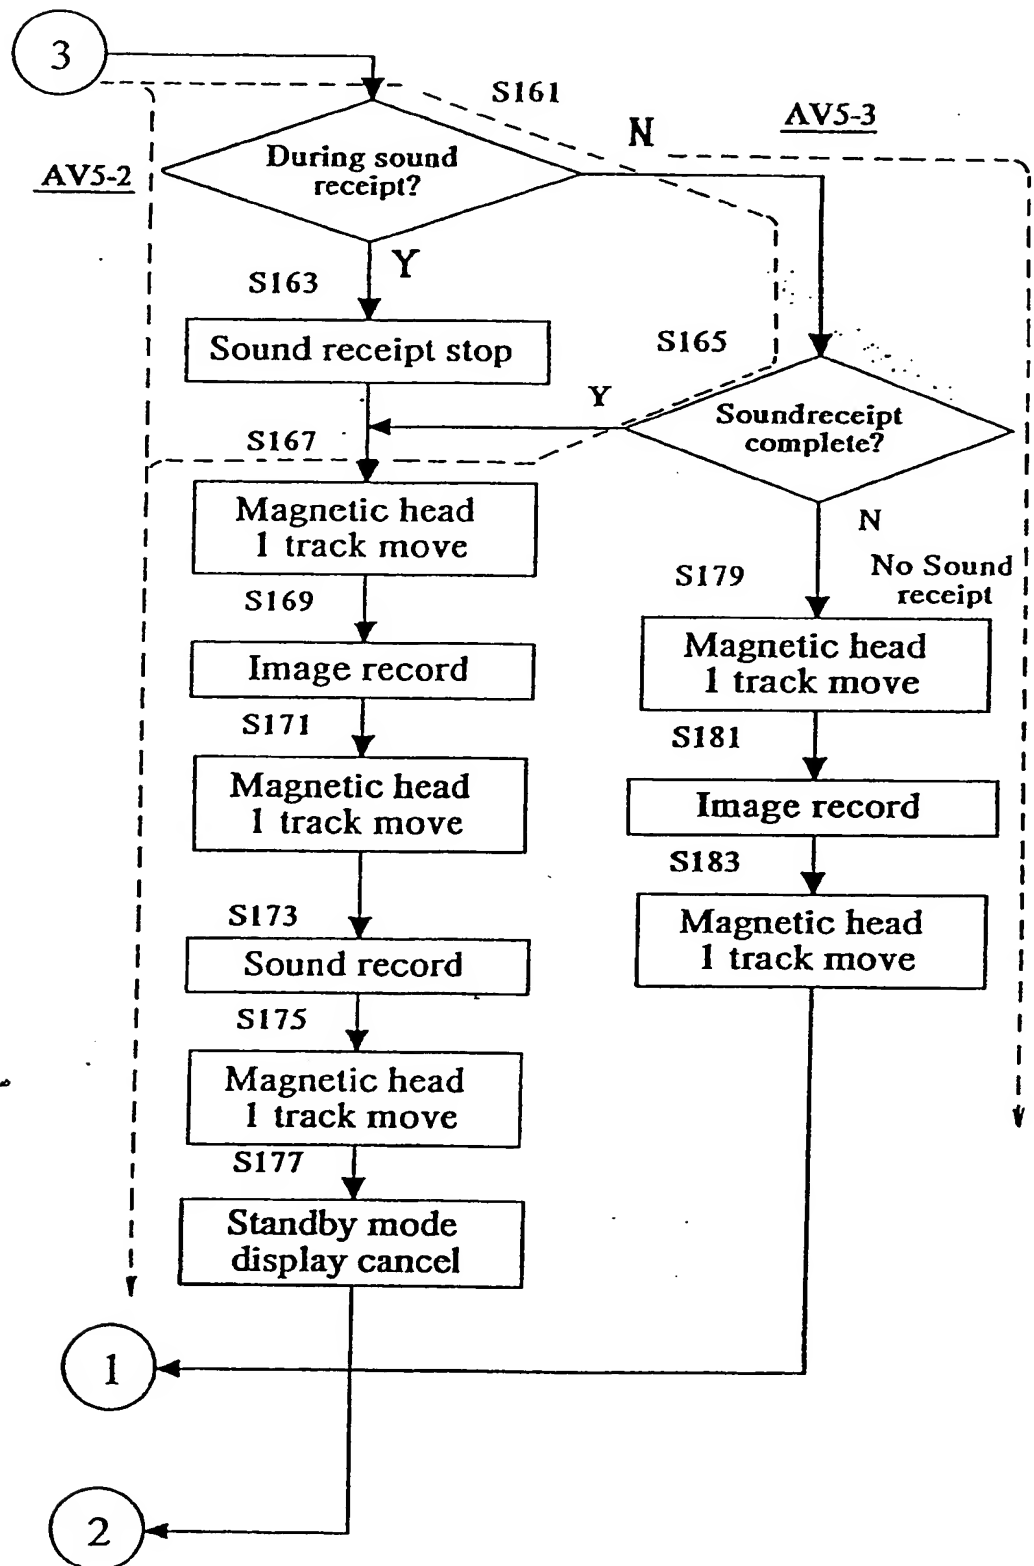


FIG. 5A

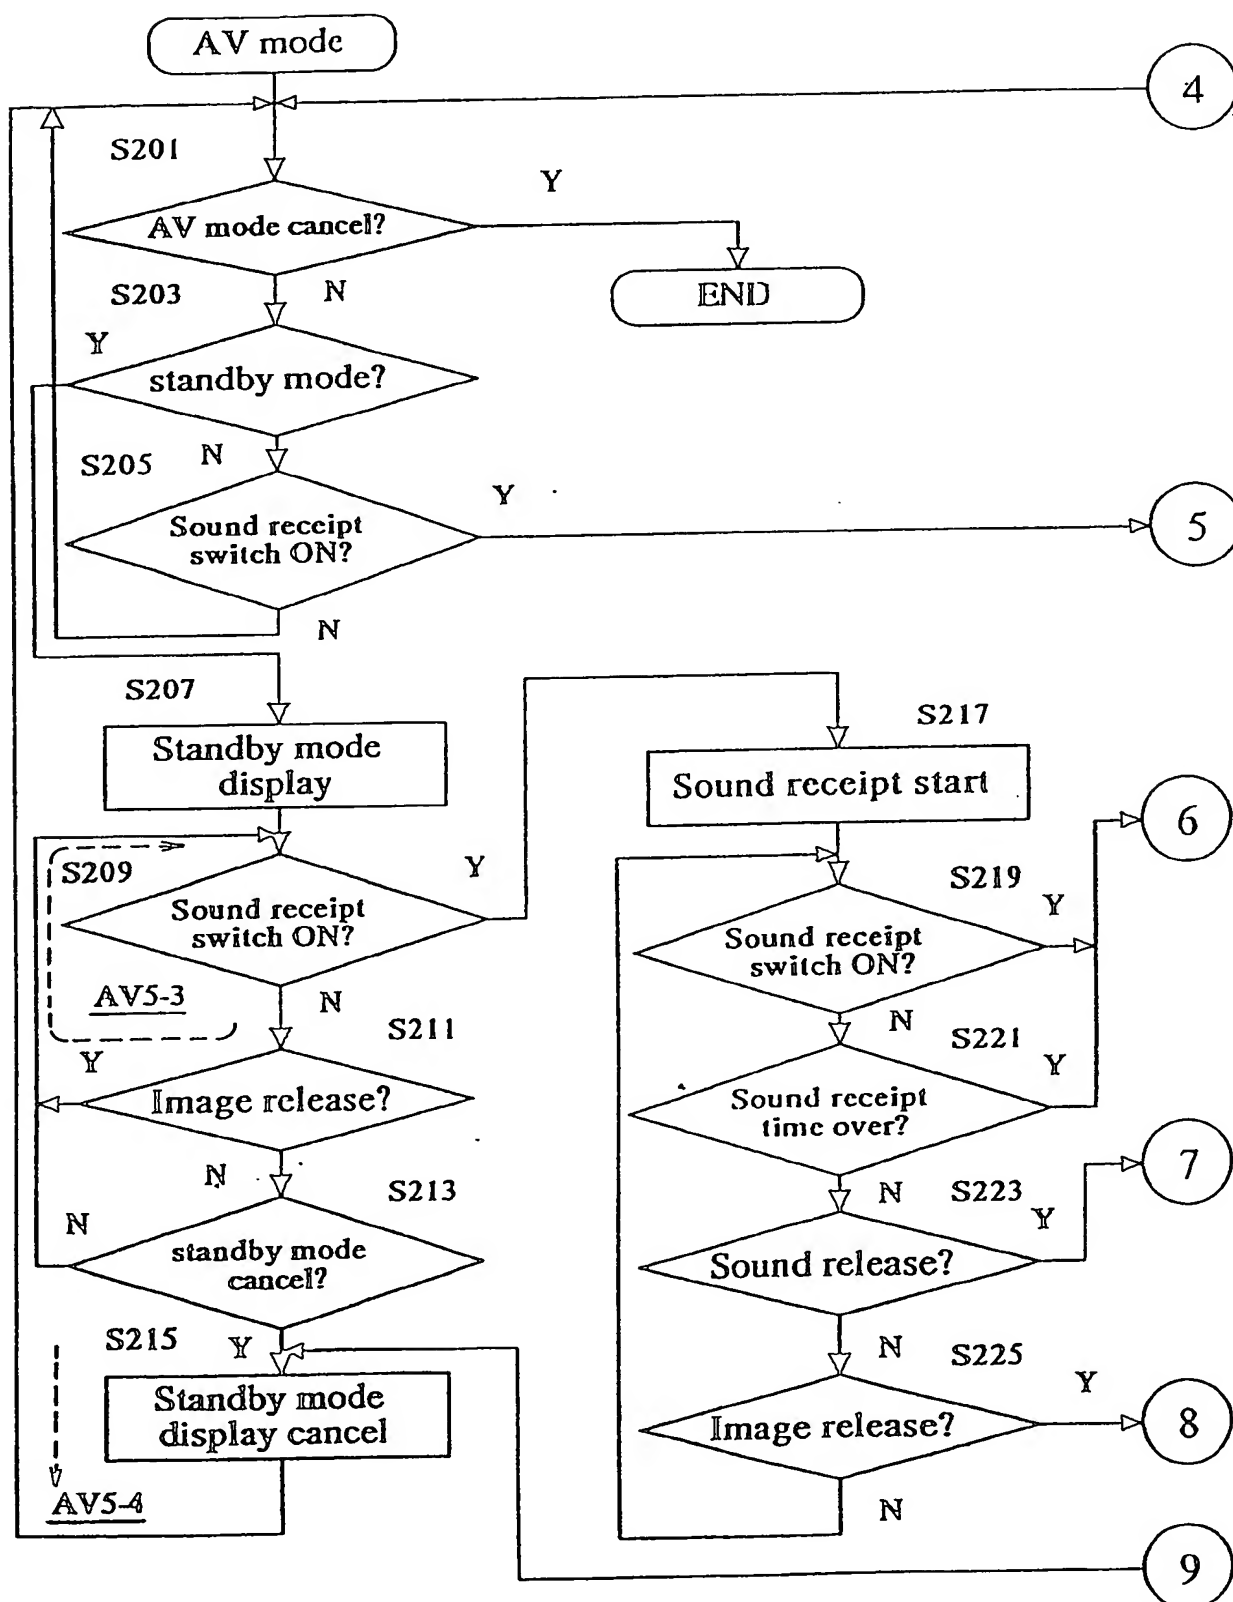


FIG. 5B


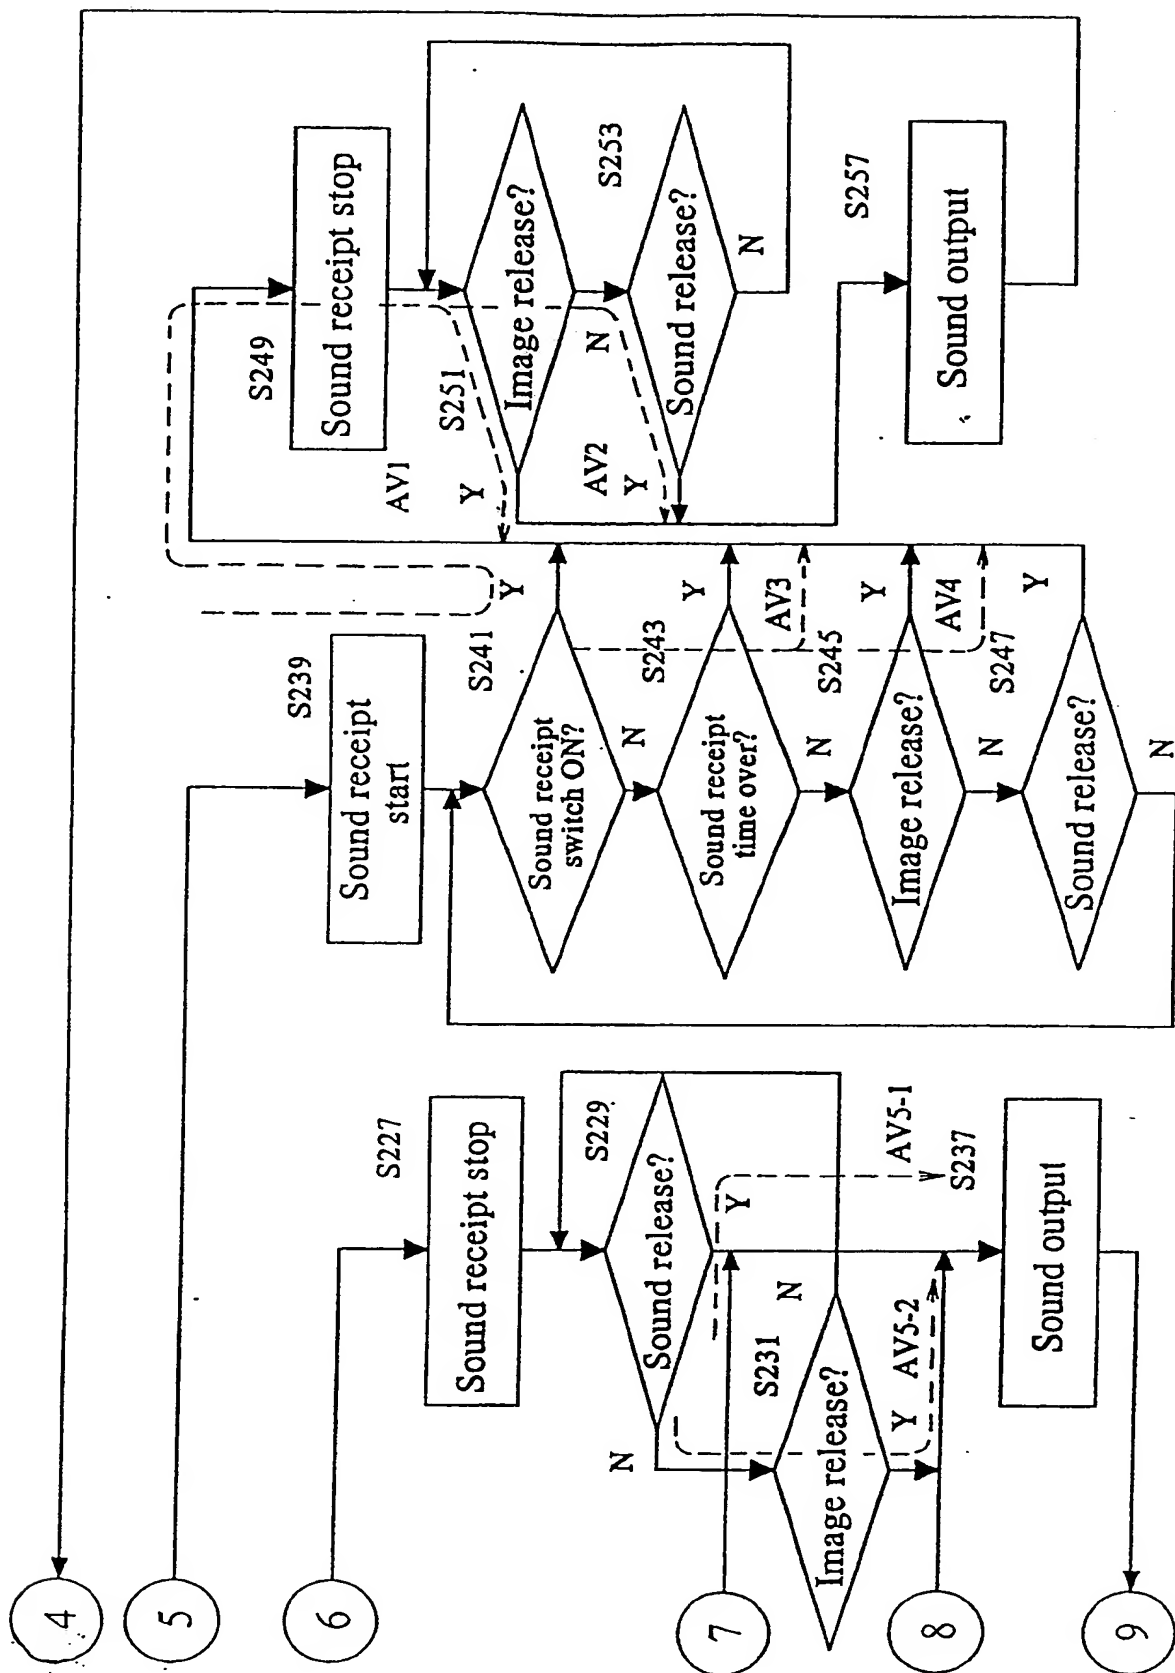


FIG. 6

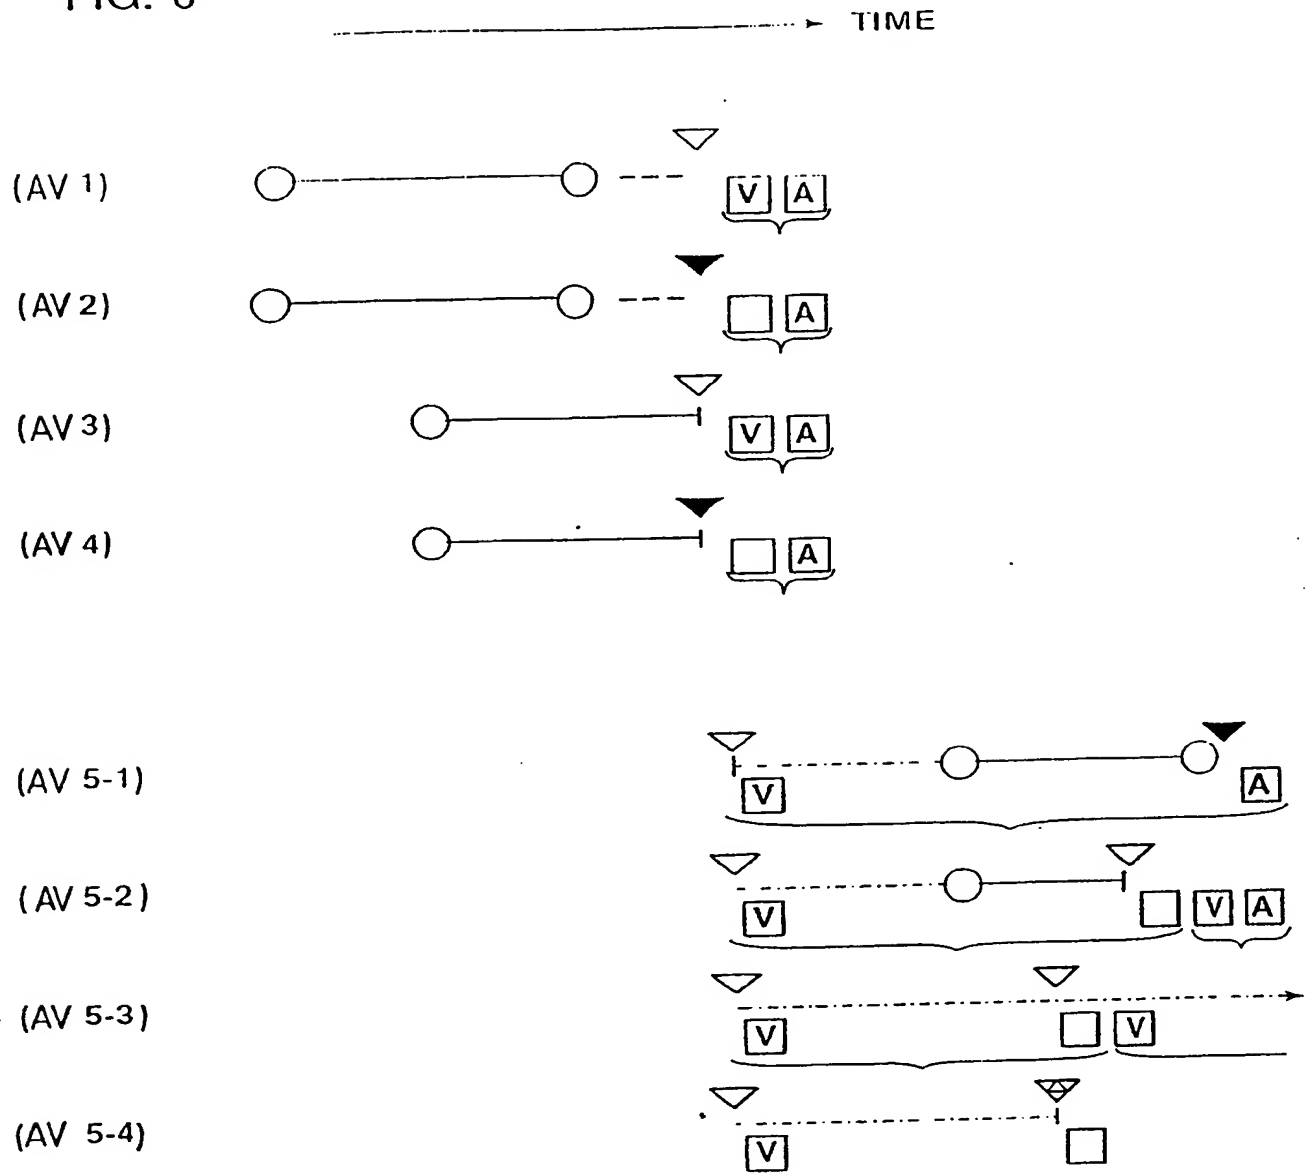

○—○ : Sound collection    ▽ : Image release    ▼ : Sound release  
 ▽ : Other switch    ----- : Standby state  
 [V] : Image recording    [A] : Sound recording    [ ] : Record none

FIG. 7

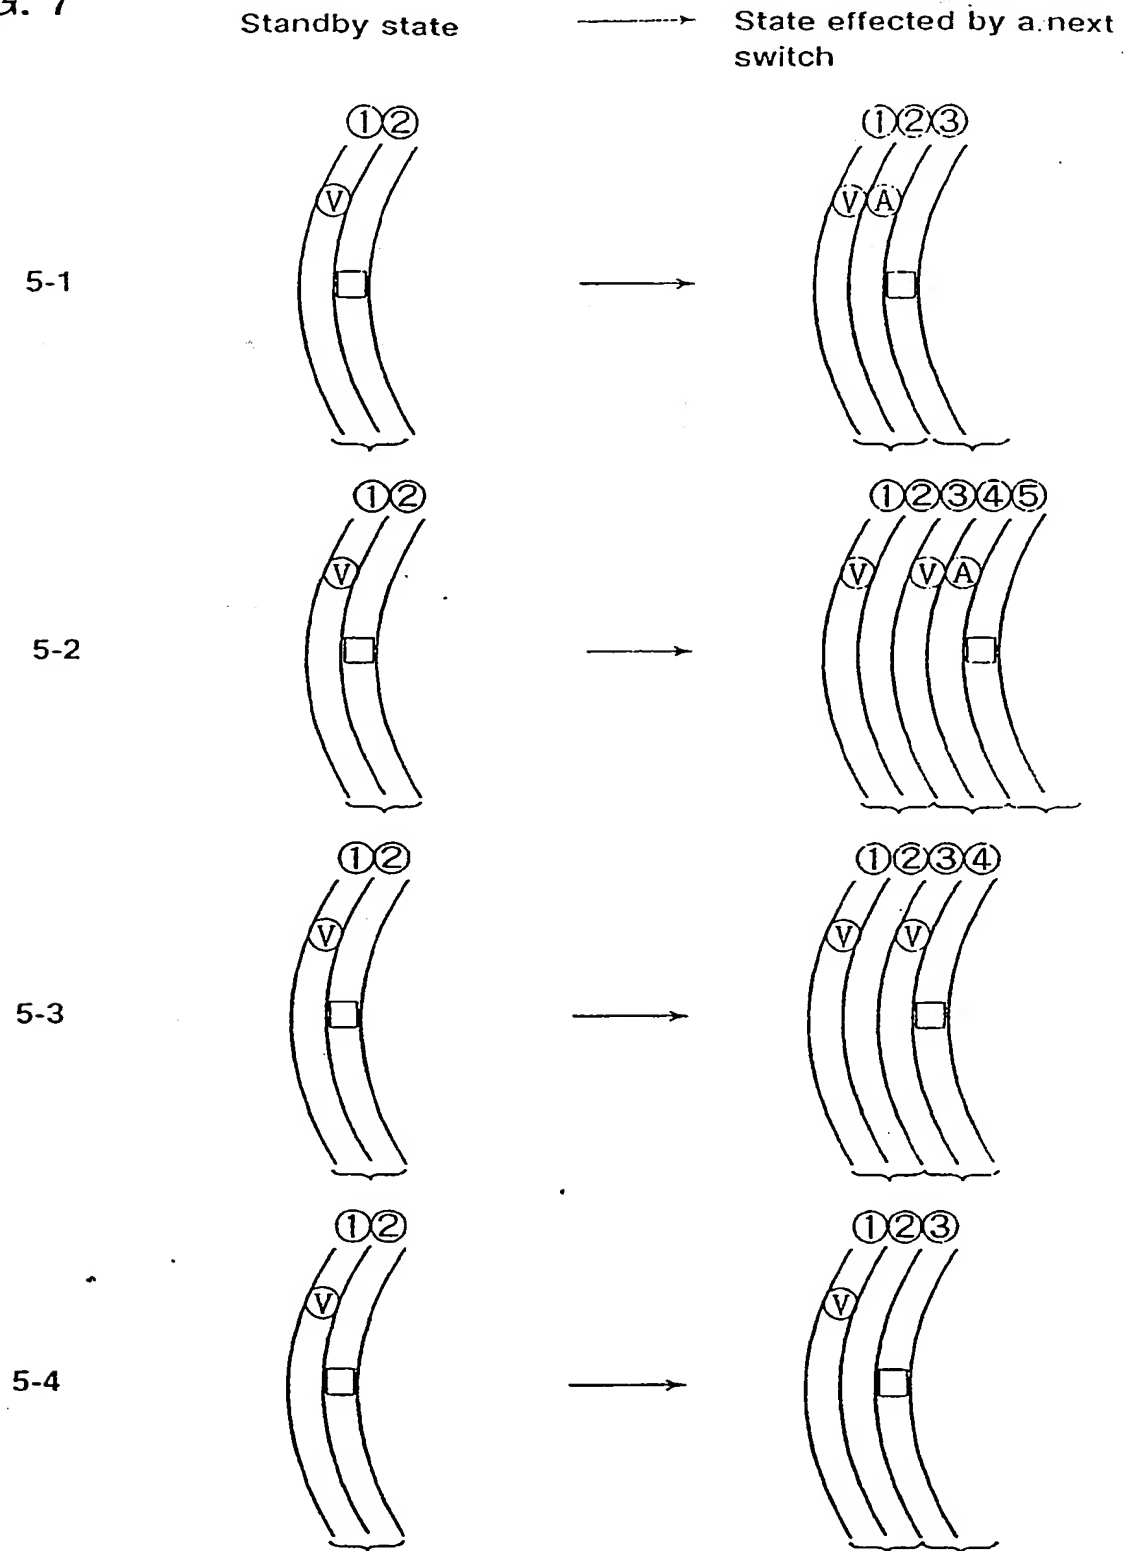


FIG. 8 A


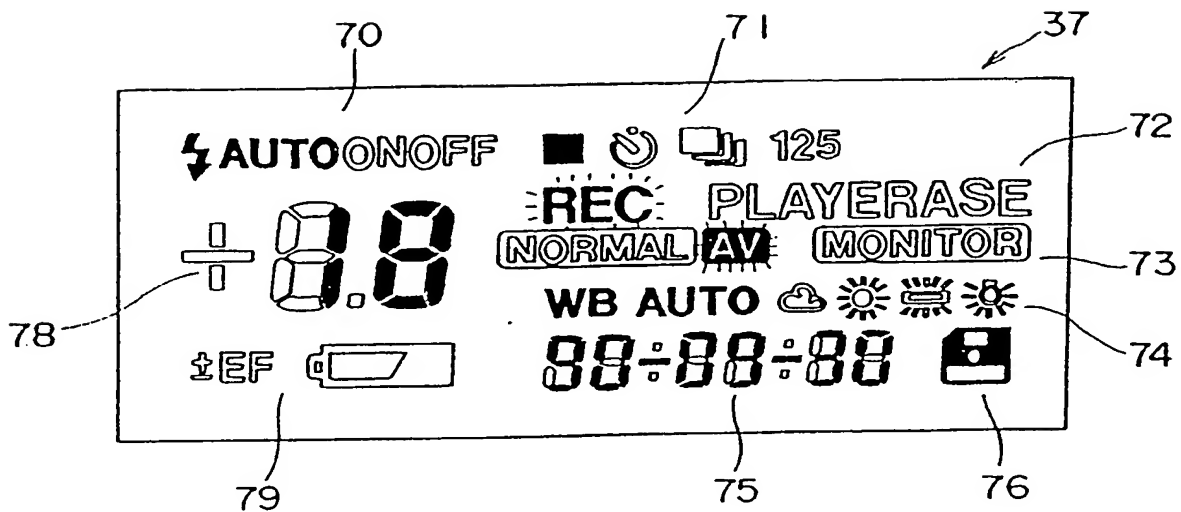


FIG. 8 B

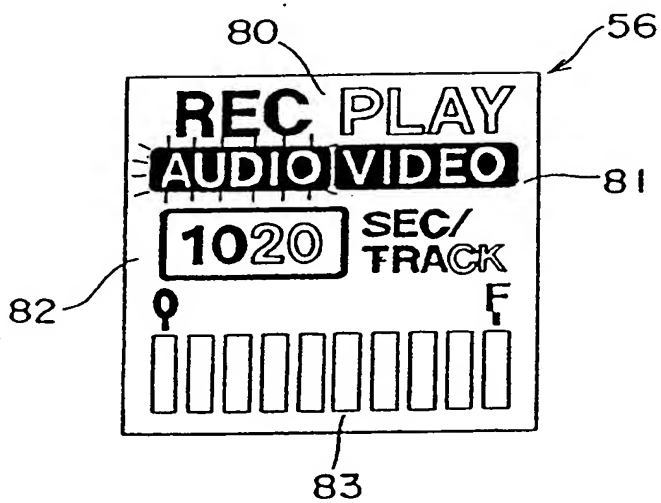

- 1 -

## RECORDING METHOD OF STILL VIDEO APPARATUS

The present invention relates to an apparatus for recording and reproducing a still image, a still video camera for example, and more precisely, it relates to a recording method of a still video apparatus (still image recording and play-back apparatus) in which sound signals can be recorded and reproduced.

In a still video apparatus, a unit of one or two recording tracks out of a plurality of recording tracks provided on a magnetic disc forms one field picture plane or one frame picture plane. In a still video apparatus in which sound signals can be recorded, a sound lasting from 5 to 20 seconds can be recorded on one track. Since one turn of the magnetic disc corresponds to one field of the image signal (about 1/60 second in the case of an NTSC system), upon recording, sound signals to be recorded within a predetermined time are first stored in a memory means, and then, the time base of the stored sound signals is compressed so that they may be read and recorded on the magnetic disc. Accordingly, the known still video apparatus is usually provided with an image release switch

which is actuated to record a picture, a sound collecting switch which is actuated to store a sound in the memory means, and a sound release switch which is actuated to record the stored sound onto the magnetic disc.

In a recent still video apparatus, a recording system in which the image signals and the sound signals are recorded in a corresponding fashion has been adopted, which system will be referred to hereinafter as an AV (Audio-Visual) mode. In this AV mode type of recording system, for example, the tracks of the magnetic disc for the image signals and the sound signals are preset, so that when the image signals or the sound signals are recorded, data signals including the corresponding sound signals or image signals and discrimination marks which differentiate the presence of the corresponding image signals or sound signals are recorded on the respective tracks. Upon reproducing the sound and image signals, the discrimination marks are reproduced to carry out the necessary operations in accordance with the reproduced discrimination marks. The data signals are subject to DPSK modulation and overlapped on the image signals so as to be recorded together.

In a known first recording method in the AV mode, first the storage of the sound signals in the memory means commences, and when the image release switch is actuated during the storage of the sound signals, the image signals



are recorded. When the storage of the sound signals is complete, the stored sound signals are recorded.

In a known second recording method in the AV mode, when the image release switch is actuated, the image signals are first recorded, and thereafter, the storage of the sound signals automatically begins. When the storage of the sound signals is complete, the stored sound signals are automatically recorded.

However, in the first recording method, since the image signals are recorded during the storage of the sound signals, sounds produced when the diaphragm or shutter is driven upon operation of the image release switch may be recorded as noise, or the sound signals can deteriorate because of a fluctuation of the sound signal level due to a voltage drop caused by the commencement of the magnetic disc rotation or the emission of strobe light.

In the second recording method, since the sound signals are automatically recorded after the image signals are recorded, undesirable sound may be recorded, or conversely, desirable sounds may not be recorded.

Furthermore, in both the first and second recording methods, since the sound signals are recorded to correspond to the recorded image signals in the AV mode, in order to stop the recording of the sound signals after the completion of the recording of the image signals, it is

necessary to actuate a mode selection switch to switch to the AV mode. To this end, to continuously record the image signals without temporarily recording the sound signals in the AV mode, the mode selection switch must be inconveniently actuated.

In addition to the foregoing, in the known recording methods mentioned above, after-recording in which the sound is recorded after the picture is recorded in the AV mode without changing the mode cannot be effected. Accordingly, it is necessary to record only the image signals in the normal mode, and then record the sound signals on the tracks of the corresponding image signals. This is troublesome.

An object of the present invention is to provide a recording apparatus and method which can eliminate the above mentioned drawbacks of the prior art.

According to the present invention, there is provided a recording method for an electronic still video apparatus in which when an image release operation is effected, image signals are picked up and recorded on a recording medium and when a sound receipt operation is effected, sound signals are received for a predetermined time, so that the received sound signals are recorded on the recording medium when a sound releasing operation is effected, the still video apparatus having an AV record mode in which the image signals and the sound signals are recorded on the recording medium in a corresponding manner, wherein the method comprises the recording of image signals

prior to the sound signals in the AV record mode when the image release operation is effected.

Preferably, if the image release operation is effected in the AV record mode during the receipt of the sound signals, the receipt of the sound signals is stopped and the image signals picked-up by the image release operation are recorded. Preferably, the sound signals received up until the image release operation are then

recorded on the recording medium.

Advantageously, if the image release operation is effected without receiving the sound signals, the image signals are recorded and the mode is transferred to the sound receipt waiting (standby) mode in which the control waits for the sound release in the AV record mode. Advantageously, if the sound release operation is effected while in the waiting mode, the received sound signals are recorded on the area of the recording medium corresponding to the area in which the image signals are recorded.

Preferably, if the image release operation is effected while in the waiting mode without effecting the sound release operation, the sound signals are not recorded on the area corresponding to the image signals recorded immediately before the transfer to the waiting mode. In this case, the image signals can be recorded on the adjacent area, so that the mode is transferred to the waiting mode.

Preferably, if an operation other than the sound release operation or the image release operation is effected while in the waiting mode, the sound signals are not recorded on the area corresponding to the recorded image signals and the waiting mode is released.

With the present invention, since the sound signals received before the image release operation are recorded to correspond to the image signals, the sound

signals are free from adverse influence caused upon image releasing.

Furthermore, since the mode is automatically transferred to the sound receipt waiting mode when the image release operation is effected before the sound signals are received, an operator can record the necessary sound signals any time after the image signals are recorded without modifying the mode (so-called "after recording").

On the other hand, if the image release operation is effected while in the sound receipt waiting mode, the image signals are recorded on the next image recording area, and thereafter, the mode is again returned to the waiting mode. If another operation is effected, the waiting mode is automatically released. Accordingly, a mode change operation is not necessary.

According to another aspect of the invention, there is provided in a still picture recorded playback equipment by which image signals obtained by photographic shooting and sound signals collected can be respectively recorded in recording media, a recording method for a still picture record playback equipment which can record image signals shot by an image release and sound signals collected up to that time in recording media, respectively, when the image release is made in sound collection worked in advance under the state of a mode of recording the image signals and the sound signals in matching thereof.

According to a further aspect of the invention, there is provided in a still picture record playback equipment by which image signals obtained by photographic shooting and sound signals collected can be respectively recorded in recording media, a recording method for a still picture record playback equipment which can record image signals shot be an image release in the state of a mode of recording the image signals and sound signals in matching thereof when the image release is made under the state of no sound collection, can shift the mode to a standby mode and can record the sound signals collected in the standby mode in an area on the recording media corresponding to the said image signals.

Preferably, when image release is made again with no sound collection made under the state of standby mode, no sounds are recorded in the area corresponding to the recorded image signals, the image signals are recorded in the next area and the standby status is made to occur again.

Preferably, when a switch other than the sound correction switch or the image release switch is operated no recording of sounds is made in the area corresponding to the image signals but the standby mode is cancelled.

Below, a detailed explanation will be made of the present invention based on embodiments shown in the attached drawings, in which:

Figure 1 is a block diagram of an internal circuit of a still video camera to which the present invention is applied, by way of example;

Figure 2 is a perspective view of the still video

camera shown in Fig. 1 as viewed from behind;

Figures 3A and 3B are front elevational views of display surfaces of LCD panels provided in the camera body and the sound adaptor, respectively of the camera shown in Fig. 2;

Figures 4A, 4B and 4C are flow charts of a main operation of the camera body of the present invention;

Figures 5A and 5B are flow charts of a main operation of the sound adaptor of the present invention;

Figure 6 shows time charts of main operations of the camera body and the sound adaptor;

Figure 7 is a diagram showing positional relationships of tracks of a magnetic disc and a magnetic head in various operations in an AV mode; and,

Figures 8A and 8B are front elevational views of display surfaces of LCD panels provided in the camera body and the sound adaptor, wherein sound storage waiting modes are indicated, respectively.

#### Examples of the

invention will be discussed below with reference to Figure 1 which shows a block diagram of an internal circuit of a still video camera of the present invention. The still video camera has a camera body 100 and a sound adaptor 200 which is detachably attached to the



camera body 100. The camera body 100 and the sound adaptor 200 are electrically connected to each other by connectors 1 and 2.

The camera body 100 has a zoom lens 3 driven by a zoom drive circuit 4. An image of an object to be taken is formed on an image sensor 5 by the zoom lens 3 and is converted to electrical signals to be output as image pickup signals from an image pickup circuit 6. The image pickup signals are subject to the necessary treatments, such as the addition of synchronous signals by an image signal processing circuit 7 to obtain image signals (video signals). The video signals are input into monitor terminal 8 and an FM modulation circuit 19 through an image/sound selection switch 9 provided on the camera body 100. The camera body 100 includes a strobe light emission unit 10 which emits an auxiliary light upon taking a picture and a strobe light control circuit 11 which controls the emission of the strobe light.

A magnetic disc 12 is used as a recording medium and is loaded in the camera body 100 to record the image signals and the sound signals. The magnetic disc 12 is rotated at a constant speed (e.g., 3600 rpm) by a spindle motor 14 controlled by a spindle motor driving circuit 13. A magnetic head 15 opposed to the magnetic disc 12 is moved in the radial direction by an actuator (not shown). The

magnetic head 15 is moved in the radial direction until it reaches a predetermined track, one of a plurality of concentric tracks (e.g., 50 tracks) formed (formatted) on the magnetic disc 12 in accordance with the control of a head driving circuit 16. A PG coil 17 is provided to generate pulses to detect a fluctuation in the revolutions per second of the magnetic disc 12, thereby keeping the speed constant. The output of the PG coil 17 is fed back to the spindle motor driving circuit 13 so that the latter detects a phase difference between the PG pulses generated by the PG coil 17 and a reference pulse, thereby controlling the rotational speed of the magnetic disc 12.

The magnetic head 15 is connected to either a modulation side including the FM modulation circuit 19 and an amplifier circuit 20 or a demodulation side including an FM demodulation circuit 21 and an amplifier circuit 22 depending on the position of a record/play-back selection switch 18a. On the modulation side, either the image signals or the sound signals are input through the image/sound selection switch 9, depending on the position of the switch, from either the image signal processing circuit 7 or the sound adaptor 200, respectively. The signals input through the selection switch 9 are then FM-modulated and amplified to be fed to the magnetic head 15. The magnetic head 15 records the FM-modulated image

signals or sound signals on the magnetic disc 12. Conversely, on the demodulation side, the FM-modulated image signals and sound signals recorded on the magnetic disc 12 and read by the magnetic head 15 are amplified and demodulated to be sent to the image signal processing circuit 7 and the sound adaptor 200, respectively.

The zoom drive circuit 4, the image pickup circuit 6, the image signal processing circuit 7, the strobe light control circuit 11, the spindle motor driving circuit 13 and the head driving circuit 16 are controlled by a system controller 23. To the system controller 23 are connected a monitor detector 24 which detects whether a monitor (not shown) is connected to the monitor terminal 8, an adaptor detector 25 which detects whether the sound adaptor 200 is mounted to the camera body 100, and a notch detector 26 which detects the presence of a write-prevent notch which is used for preventing the recorded data of the magnetic disc 12 from being erased by mistake. The outputs of these detectors 24, 25 and 26 are input to the system controller 23.

Furthermore, various switches 27, 28, 29, 30, 31, 32, 33, 34, 35, 36a and 36b are connected to the system controller 23, so that when these switches are turned ON or OFF, the necessary operations are carried out. A battery switch 27 is turned ON and OFF to supply the system

controller with power and stop the power supply, respectively (a battery which is used to power the system controller is not shown). A mode switch 28 selects either an image pickup mode or a recording mode and then a selection switch 29 selects a sub-mode of the selected image pickup mode or recording mode. An up switch 30 and a down switch 31 are actuated to increase or decrease the indicated value, for example, the track number when the magnetic head 15 is moved. A telephoto switch 32 and a wide angle switch 33 actuate the zoom drive circuit 4 to perform the power zooming in the direction of the telephoto direction or the wide angle direction, respectively. A strobe switch 34 sets a light emission mode in which strobe light is emitted, and an EF switch 35 selects an exposure correction mode in which the exposure correction value is set.

A photometer switch 36a and an image release switch 36b are actuated in association with an image release button 36 provided on the upper surface of the camera body 100, so that when the image release button 36 is depressed by a half step or full step, either the photometer switch 36a or the image release switch 36b are turned ON, respectively.

The system controller 23 controls an LCD panel 37 provided on the surface of the camera body 100.

In the sound adaptor 200, the sound received and converted to electrical signals by a microphone 40 is amplified by an amplifier circuit 41 and is subject to the necessary treatments including restriction of the bandwidth and the removal of noise etc., to form the sound signals by a sound signal processing circuit 42. The sound signals are input to a sound signal storing portion 43 through a record/play-back selection switch 18b which is controlled by a system controller 51. The record/play-back selection switch 18a of the camera body 100 is controlled by the system controller 23.

The sound signal storing portion 43 includes an A/D converter circuit 44 which converts the input sound signal to digital signals, a RAM 45 which successively memorizes the digital signals, a D/A converter circuit 46 which successively reads the digital signals memorized in the RAM 45 and converts them to analogue signals, and a digital signal processing circuit (CPU) 47 which controls the operations of the devices or circuits mentioned above. The A/D converter circuit 44 samples and performs the quantization of the analogue sound signals input thereto and converts them to digital signals.

The D/A converter circuit 46 successively converts the digital sound signals read from the RAM 45 into analogue sound signals. The digital signal processing circuit 47 successively stores the digital sound signals

converted by the sound signal storing portion 43 in the RAM 45 upon receiving the sound, and successively reads the digital sound signals stored in the sound signal storing portion 43 in a predetermined compressed (contracted) time (e.g., about 1/60 second), so that the digital sound signals are converted to analogue sound signals by the D/A converter circuit 46, upon recording, respectively. Thus, the time base of the sound signals of, for example, 5, 10 or 20 seconds is compressed to about 1/60 second.

Either the sound signals received by the microphone 40 or the FM modulation signals input to the camera body 100 and modulated by sound signal compressing and reproducing circuit 48 are input to the sound signal storing portion 43 depending on the position of the record/play-back selection switch 18b. The output of the sound signal storing portion 43 is sent to a compressed sound recording and processing circuit 49 and a sound signal processing circuit 50. The sound signals output from the compressed sound recording and processing circuit 49 are input to the camera body 100 and the modulation side (FM modulation circuit 19) through the image/sound selection switch 9. The sound signals output from the sound signal processing circuit 50 are input to the camera body 100 to be output from the monitor terminal 8. The sound signal compressing and reproducing circuit 48

performs the necessary operations, such as deemphasizing of the sound signals with the compressed time base read from the magnetic disc 12, and the compressed sound recording and processing circuit 49 performs the necessary operations, such as preemphasizing of the sound signals with the compressed time base read from the RAM 45.

The digital signal processing circuit 47 of the sound signal storing portion 43 is controlled by the system controller 51. Various switches 52, 53, 54 and 55 are connected to the system controller 51, so that the latter can perform the necessary operations when these switches are turned ON and OFF. When a sound receipt starting switch 52 is actuated, sound is received by the microphone 40 and provisionally stored in the RAM 45. A sound release switch 53 is actuated to read the sound signals stored in the RAM 45 and record the same on the magnetic disc 12 of the camera body 100. A sound receipt cancelling switch 54 erases the sound signals stored in the RAM 45. A recording time changing switch 55 switches the sound compressing mode to change the recording time and can selectively set a 10 second mode or a 20 second mode as in the illustrated embodiment.

The system controller 51 controls the indication of an LCD panel 56 provided on the surface of the sound adaptor 200.

Figure 2 shows the camera body 100 and the sound adaptor 200 as constructed above. The camera body 100 has a protective cover 60, which protects the magnetic disc. The magnetic disc 12 can be loaded and unloaded with the protective cover 60 in place. Numerals 61 and 62 designate an ejection button which opens the protective cover 60 to load and unload the magnetic disc and a finder (eyepiece side of finder), respectively.

Figure 3A shows the indication of the LCD panel 37 provided on the camera body 100, by way of example. Numeral 70 designates a strobe light emission mode indicating portion which indicates three modes of automatic emission. From the left to right these modes are (AUTO), compulsory emission (ON), and no emission (OFF). A picture taking mode indicating portion 71 next to the strobe light emission mode indicating portion 70 indicates a single mode, a self-timer mode, a continuous 1-shot mode (one picture per second), a continuous 2-shot mode (two pictures per second), and a continuous 5-shot mode (five pictures per second), located in this order from left to right. The line directly below the picture taking mode indicating portion 71 is an operation mode indicating portion 72 which indicates a record mode (REC), a play-back mode (PLAY) and an erasing mode (ERASE), located in this order from the left. The line directly below the operation



mode indicating portion 72 is a mode indicating portion 73 which indicates a normal mode (NORMAL) in which only the picture is recorded, an AV mode (AV) in which both the picture and the sound are recorded, and a monitor mode (MONITOR) in which only the play-back is effected, located in this order from left to right.

The line directly below the mode indicating portion 73 is a WB mode indicating portion 74 which indicates a white balance mode (WB), an auto mode (AUTO), a cloud balance mode, a fine balance mode, a fluorescent lamp balance mode, and an incandescent lamp balance mode, located in this order from left to right.

Below the WB mode indicating portion 74 is provided a calendar indicating portion 75 which indicates year-month-day and hour-minute-second. A symbol next to the calendar indicating portion 75 is a magnetic disc indicating portion 76 which indicates whether the magnetic disc is loaded. The mathematical symbols and numerals below the light emission indicating portion 70 form a data indicating portion 78 which indicates the track number and exposure correction value etc. A warning indicating portion 79 below the data indicating portion 78 indicates whether the exposure correction value is set and the battery power is sufficient.

Figure 3B shows an indication of the LCD panel 56

provided on the sound adaptor 200 by way of example. The uppermost line is an operation mode indicating portion 80 which indicates a record mode (REC) and a play-back mode (PLAY). The line below the operation mode indicating portion 80 is a recording subject indicating portion 81 which indicates that the subject to be recorded is either sound (AUDIO) or image (VIDEO). A sound recording time indicating portion 82 located below the recording subject indicating portion 81 indicates the maximum recording time for which the sound can be recorded, i.e., 10 second mode (10) or 20 second mode (20). The bar codes located below the sound recording time indicating portion 82 denote a recording state indicating portion 83. The individual bar codes are successively lit to indicate the time which has elapsed from the commencement of sound recording.

Figures 8A and 8B respectively show example indications of the LCD panels 37 and 56 in a waiting mode of the present invention. In Figs. 8A and 8B, the white portions denote no indication and the black portions denote the effective indications. The letters surrounded by the black radial lines mean that the indication light is blinking. For example, "REC" and "AV" in Fig. 8A, and "AUDIO" in Fig. 8B are illustrated as a blinking light.

The following discussion will be addressed to the normal mode and the AV mode of the still video camera

of the present invention.

Normal Mode:

In this mode, the sound signals and image signals are independently recorded and reproduced. For instance, when the image release button 36 (switches 36a and 36b) is turned ON, the image signals are recorded on the magnetic disc 12. Control signals which are recorded simultaneously with the image signals indicate, upon play-back of the track, whether or not the image signal is recorded independently of the sound signal. In the AV mode the control signals include data corresponding to both image signals and the track numbers of the sound signals. The control signals are subject to DPSK (Dual Phase Shift Keying) modulation and are superimposed and recorded on the FM-modulated image signals. The data of the control signals is controlled by the system controller 23 and is modulated and demodulated by circuits (not shown), and is decoded by the system controller 23.

When the sound receipt starting switch 52 is turned ON, the sound signals are stored in the RAM 45. Thereafter, when the sound release switch 53 is turned ON, the sound signals stored in the RAM 45 are recorded on the magnetic disc 12. An information signal which is recorded simultaneously with the sound signals indicates whether or not the sound

signals are separately recorded. In the normal mode of the illustrated embodiment, the sound signals and the image signals can be recorded on optional tracks.

#### AV Mode:

The AV mode is a mode in which the sound signals and the image signals are recorded and reproduced in association with each other. Namely, the sound signals and the image signals are recorded on adjacent tracks of the magnetic disc 12, respectively and reproduced with a certain relationship therebetween. Upon recording, the data which represent the sound signals and the image signals are recorded in the respective data portions.

The main operation of the still video camera is as follows. The main operation is controlled and carried out by the system controllers 23 and 51. Each of the system controllers 23 and 51 usually comprises a microcomputer and is operated in accordance with a program stored in an internal ROM of the microcomputer.

#### Recording and Play-Back at Normal Mode:

When the normal mode is selected, the following operation is effected and controlled by the system controllers 23 and 51.

N1: Recording of Image

When the image release button 36 is depressed to turn the photometering switch 36a ON, the metering of an object distance, the calculation of the exposure, and the automatic focus adjustment, etc. are performed.

Furthermore, when the image release button 36 is fully depressed to turn the image release switch 36b ON, the shutter is opened, so that an object image is formed on the image sensor 5 by the zoom lens 3. The image pickup signals converted to electrical signals by the image sensor 5 are recorded on the magnetic disc 12 as FM modulation signals through the image pickup circuit 6, the image signal processing circuit 7, the FM modulation circuit 19, the amplifier circuit 20, the record/play-back selection switch 18a, and the magnetic head 15.

On the other hand, when the photometer switch 36a is turned ON, the spindle motor 14 is driven by the spindle motor driving circuit 13 to rotate the magnetic disc 12 at a constant speed. When the magnetic head 15 is moved to a predetermined track through the head driving circuit 16, the image signals for one field are recorded on the associated track by the magnetic head 15. Upon recording the image signals, the DPSK-modulated information signals are superimposed and recorded on the FM-modulated image signals of the same track.

## N2: Recording of Sound Signals in the Normal Mode

When the sound receipt starting switch 52 of the sound adaptor 200 is actuated, the sound signals within a predetermined time (10 or 20 seconds in the illustrated embodiment) are recorded in the RAM 45. Namely, the sound signals received by the microphone 40 are converted to digital signals and stored in the RAM 45 through the amplifier 41, the sound signal processing circuit 42, the record/play-back selection switch 18b, the A/D converter circuit 44 and the digital signal processing circuit 47.

When the sound release switch 53 is turned ON, the sound release switch actuating signals (signals for commencing the recording of the sound signals) are sent to the system controller 23 of the camera body 100 from the system controller 51, and the digital sound signals, which are stored in the RAM 45 with a compressed time base, are read out. The digital sound signals are then converted to analogue signals by the D/A converter circuit 46 and fed to the camera body 100 through the compressed sound signal recording and processing circuit 49 and the connectors 1 and 2.

In the camera body 100, the magnetic disc 12 is rotated at a constant speed by the system controller 23 which receives a start signal of the recording of the sound signals to move the magnetic head 15 to a predetermined

track. Thereafter, the sound/image selection switch 9 is switched to the sound side and the record/play-back selection switch 18a is switched to the record side. The FM-modulation circuit 19 and the amplifier 20, etc., stand by to commence the operation. The compressed sound signals input from the connector 1 are fed to the magnetic head 15 through the image/sound selection switch 9, the FM-modulation circuit 19, the amplifier 20, and the record/play-back selection switch 18a, and recorded on a single track of the magnetic disc 12 as FM-modulation signals. Note that the above-mentioned control signals are recorded superimposed on the sound signals.

### N3: Reproduction of Image Signals in the Normal Mode

When the monitor is connected to the monitor terminal 8, the connection is detected by the monitor detector 24. In response to the detection signal, the system controller 23 enables an operator to select the play-back mode. Consequently, when an operator actuates the mode switch 28, the play-back mode can be selected. In the play-back mode, when the power switch 27 is turned ON, the magnetic disc 12 is rotated at a constant speed. When the up-switch 30 and the down-switch 31 are turned ON, the magnetic head 15 is radially moved to increase or decrease the track number track by track. Consequently, when the image release switch 36b is turned ON, the signals recorded on the associated track are read by the magnetic head 15. The signals are then demodulated by the FM-demodulation circuit 21 through the amplifier 22 and output from the monitor terminal 8 through the image signal processing circuit 7. The still picture may be seen if a TV monitor is connected to the monitor terminal 8.

### N4: Reproduction of Sound Signals in the Normal Mode

If the signals read from the magnetic disc 12 are sound signals, the sound signals are processed in the sound adaptor 200. When the play-back mode is selected, the play-back mode signals are sent to the system controller 51



from the system controller 23. The system controller 51 which receives the play-back mode signals switches the record/play-back selection switch 18b to the play-back side to start the play-back of the sound signals.

The sound signals demodulated by the FM-demodulation circuit 21 are input to the sound adaptor 200 through the connectors 1 and 2, and converted to digital sound signals by the A/D converter circuit 44 through the sound signal compressing and reproducing circuit 48 to be stored in the RAM 45. When the sound signals for a signal track are stored in the RAM 45, the digital sound signals with the initial time base are read from the RAM 45. Consequently, the digital sound signals are output from the monitor terminal 8 as analogue sound signals through the D/A converter circuit 46, the sound signal processing circuit 50, and the connectors 2 and 1. Accordingly, if a speaker (not shown) is connected to the monitor terminal 8 through a monitor amplifier, the sound becomes audible.

#### AV: Record and Play-Back in the AV mode

The operations in the AV mode will be described below with reference to the flow charts shown in Figs. 4 and 5.

Figures 4 and 5 show the operations of the camera body 100 and the sound adaptor 200, respectively. In the flow charts, the portions corresponding to the respective

operations discussed below are identified by dotted lines and corresponding letters (e.g., AV1, AV2, AV3, etc.). The sound receiving operation is effected in the sound adaptor 200, and the image pickup operation and the recording of the image and sound signals are carried out in the camera body 100.

The operations in the camera body 100 and the sound adaptor 200 are performed by the system controllers 23 and 51 in accordance with the programs stored in the internal ROMs thereof.

The necessary data communication is carried out between the system controllers 23 and 51. For instance, when the image release switch 36b is turned ON, an image release actuating signal is sent from the system controller 23 to the system controller 51. When the sound release switch 53 is turned ON, a sound release actuating signal is sent from the system controller 51 to the system controller 23.

In the AV mode, the image signals and the sound signals are recorded on adjacent tracks of the magnetic disc. Note the single mode is a mode in which the image signals for one field are processed when the image release switch 36b is switched from OFF to ON.

AV1: When Image Release Switch is turned ON after

Sound is received by Microphone

When the sound receipt starting switch 52 is turned ON, the sound signals are received in a predetermined period of time. After the receipt of sound signals is complete, and when the image release switch 36b is turned ON, the image signals are recorded on the tracks for image signals. Thereafter, the received sound signals are recorded on the tracks for the sound signals adjacent to the tracks on which the image signals have been recorded.

The timing chart for the above-mentioned operations is shown at AV1 in Fig. 6. In Fig. 6, "○ - ○" represents the commencement and completion of the receipt of sound, "V enclosed in □" the recording operation of the image signals, "A enclosed in □" the commencement of the receipt of sound, and "□" no recording. Furthermore, "▽" represents the releasing of the image signals (when the image release switch 36b is turned ON), and "▼" the releasing of the sound signals. (when the sound receipt starting switch 52 is turned ON).

When the sound receipt starting switch 52 is turned ON, the sound signals within a predetermined period of time are stored in the RAM 45, similar to the operations in the normal mode (steps S201 ~ S205, S239, S241, S243~ S247, S249 in Figs. 5A and 5B). When the sound signals of the predetermined period of time are stored in the RAM 45, the control proceeds to

steps S251 and S253. If the switch 53 or 36b is turned ON, the stored sound signals are output to the camera body 100 (step S257).

If the image release switch 36b is turned ON in the waiting state, the system controller 23 checks whether the sound is being stored, or if not, whether the storage of the sound signals is completed (steps S101, S103, S119~S123 in Fig. 4A). If the sound signals are being stored, receipt of the sound signals is stopped (i.e., the image release signal is sent to the sound adaptor 200), and the control proceeds to step S125. If the sound signal is neither being received nor stored in the RAM 45, control is directly returned to step S101. If the sound signal is not being received and the storage thereof in the RAM 45 is completed, control proceeds to step S125 (steps S119~S123). The check operation mentioned above will be hereinafter referred to as "sound receipt check operation."

If the storage of the sound signals is completed, the image signals picked-up by the zoom lens 3 and the image sensor 5 are recorded on the image signal track of the magnetic disc 12 (step S125). When recording is completed, the magnetic head 15 is moved to an adjacent sound signal track of the magnetic disc 12 (step S127). Thereafter, the sound signals stored in the RAM 45 are output from the sound adaptor 200 to record the same on the sound signal

track of the magnetic disc 12. Thereafter, the magnetic head 15 is moved to an adjacent image signal track, and control is returned to step S101 (steps S127, S129, S131). In the AV mode, upon recording the sound signals and the image signals, the corresponding sound signal track number and the corresponding image signal track number are recorded in the respective code signals, as mentioned above.

AV2: When Sound Release Switch is turned ON after Sound Signals are received

When the sound release switch 53 is turned ON without turning the image release switch 36b ON after the sound receipt is completed, the magnetic head 15 is moved to an adjacent sound signal track of the magnetic disc 12 to record the received sound signals on the sound signal track (see AV2 in Fig. 6).

This operation will be discussed below with reference to the flow chart shown in Figs. 4 and 5.

The sound adaptor 200 outputs the sound signals to the camera body 100 when the sound release switch 53 is turned ON in the waiting position following the completion of the receipt of the sound signals (steps S251~S257).

On the other hand, in the camera body 100, the magnetic head 15 is moved to the image signal track and

control does not proceed until the image release switch 36b or the sound release switch 53 is turned ON (steps S101 ~ S105). If the sound release switch 53 is turned ON in the waiting position, the sound receipt is checked (steps S107~S111). Here, since a sound signal is not being received and since the storage of the sound signals is complete, the magnetic head 15 is moved by one track to record the sound signals output from the sound adaptor 200 onto the sound signal track (steps S101~S107, S111~S115). Thereafter, the magnetic head 15 is moved by one track and control is returned to step S101 (steps S117, S101 ~ S105).

As can be understood from the foregoing, when sound releasing is effected without effecting image releasing, after the sound signals have been received, the tracks corresponding to the image signals remain blank. In other words, the magnetic head jumps the image signal tracks to record on the sound signal tracks. Accordingly, the image signals can be recorded later on the blank image signal tracks corresponding to the alternating sound signal tracks.

AV3: When Image Release Switch is turned ON during Receipt of Sound Signals

When the image release switch 36b is turned ON during the receipt of the sound signals, the sound receipt is stopped. The image signals are then recorded on the image

signal track and the received sound signals are recorded on the corresponding sound signal track (see AV3 in Fig. 6).

This operation will be explained below with reference to the flow charts shown in Figs. 4 and 5. When the image release switch 36b is turned ON during the receipt of the sound by the sound adaptor 200, the image pickup operation and the checking of the sound receipt are carried out (steps S101 ~ S103, S119~ S123). Here, since the sound is being received, the sound receipt stop signal is sent to the sound adaptor 200 so that the sound receipt is stopped (steps S119 and S121). The image signals that have been picked up are then recorded on the image signal track (step S125). Thereafter, the magnetic head 15 is moved to the adjacent sound signal track to record the sound signals output from the sound adaptor 200 on the sound signal track (steps S127 and S129). The magnetic head 15 is then moved to the adjacent image signal track, and the control is returned to step S101 (step S131).

When the sound adaptor 200 receives the image release signal from the camera body 100 during the receipt of the sound signals, the sound receipt is stopped (steps S245 and S249). Thereafter, the sound signals received before the sound receipt is stopped are output to the camera body 100 and the control is then returned to step S201 (steps S251 and S257). The output sound signals are recorded on the

sound signal track at step S129 mentioned above.

As can be seen from the above discussion, when the image release switch 36b is turned ON during the receipt of the sound signals, the sound receipt is stopped, and accordingly, no noise will occur in the received sound signals due to the release of the image signals. Furthermore, no voltage drop takes place, resulting in high quality sound signals.

AV4: When Sound Release Switch is turned ON during Receipt of Sound Signals

When the sound receipt commences without recording the image signals and if the sound release switch 53 is turned ON during the receipt of the sound signals, the sound receipt is stopped and the sound signals received up until then are recorded on the adjacent sound signal track by the magnetic head after having jumped the preceding image signal track (see AV4 in Fig. 6). This operation will be discussed below.

When the sound receipt starting switch 52 in the sound adaptor 200 is turned ON, the receipt of sound signals commences (steps S201 ~ S205, S239~ S247). If the sound release switch 53 is turned ON during the receipt of sound, the sound receipt is stopped and the sound signals received are output to the camera body 100 (steps S247, S249~



S257).

The magnetic head 15 is located above the image signal track of the magnetic disc and waits for the operation of the sound release switch 53 (steps S101~S105). When the sound release switch 53 is turned ON, the magnetic head 15 is moved to the corresponding adjacent sound signal track in accordance with the sound release signal from the sound adaptor 200 to record the sound signals output from the sound adaptor 200 onto the sound signal track (steps S105, S107, S111~S115). Thereafter, the magnetic head 15 is moved to the next image signal track and waits for the operation of the image release switch 36b or the sound release switch 53 (steps S117, S101 ~ S105).

As can be understood from the above discussion, when the sound release switch 53 is turned ON during the receipt of sound and before the image signals are recorded, the sound receipt is stopped, and the magnetic head jumps the intended image signal track and is moved to the associated adjacent sound signal track to record the sound signals which were received before the sound release switch 53 was turned ON. The image signals can then be recorded later on the blank image signal track.

AV5: When Image Release Switch is turned ON before

## Receipt of Sound Signals

When the image release switch 36b is turned ON before the sound signals are received, the image signals are recorded on the intended image signal track of the magnetic disc 12. Thereafter, the magnetic head 15 is moved to the adjacent sound signal track and the waiting mode is indicated in the LCD panel 37 (steps S101, S103, S119, S123, S133~S137). Control then proceeds to steps S139~S143. This will be referred to as the "sound receipt waiting mode".

The sound adaptor 200 receives the sound receipt waiting mode signal to indicate the sound receipt waiting mode in the LCD panel 51 and waits until the sound receipt starting switch 52 or the image release switch 36b is turned ON, or the sound receipt waiting mode is released (steps S203, S207 ~ S213).

In accordance with the operation effected by an operator, four main operations are carried out. These main operations will be described below (see AV5-1 ~ AV5-4 in Fig. 6 and 5-1~5-4 in Fig. 7). In Figure 7, "①~⑤" designate the track number, "□" the position of the magnetic head 15, "V circled by ○" the recording of the image signals, and "A circled by ○" the recording of the sound signals, respectively. In this embodiment, in the AV mode, the sound signals are recorded on tracks which are

adjacent to the image signal tracks in the inward radial direction, as shown in Fig. 7.

AV5-1: When Sound Receipt Starting Switch is turned ON and When Sound Release Switch is turned ON During or After Receipt of Sound

During the receipt of the sound signals, sound receipt is stopped, and the sound signals received up until then are recorded on the sound signal track (sound signal recording track) ② above which the magnetic head 15 is located in a standby position. Similarly, if the receipt of the sound signals has been completed, the received sound signals are recorded on the sound signal track ②. Thereafter, the magnetic head 15 is moved to the adjacent image signal track (image signal recording track) ③.

When the sound receipt commences after recording the image signals and if the sound release switch 53 is turned ON during the receipt of the sound signals, the sound receipt is stopped and the sound signals received up until then are recorded on the adjacent sound signal track by the magnetic head after having jumped the preceding image signal track (not shown).

The above mentioned operation will be discussed below with reference to the flow charts shown in Figs. 4 and 5.

The image signals are recorded on the image signal track ① and the magnetic head 15 is moved to the sound signal track ②. In the camera body 100, whether the sound release switch 53 is turned ON, etc., is repeatedly checked (steps S139 ~ S143). On the other hand, in the sound adaptor 200, when the sound receipt starting switch 52 is turned ON, the sound receipt is effected (steps S209, S217~ S229).

In the above mentioned operations, when the sound release switch 53 is turned ON, the received sound signals are output to the camera body 100 from the sound adaptor 200. If the sound signals are being received, the sound receipt is first stopped, and then the received sound signals are output to the camera body 100. On the other hand, when the sound release switch 53 is turned ON, the system controller 23 of the camera body 100 checks whether the sound signals are received (steps S149~ S153). If the sound signals are being received, the sound receipt is stopped. Thereafter, the sound signals sent from the sound adaptor 200 are recorded on the sound signal track ② in the waiting position (step S155). Thereafter, the magnetic head 15 is moved to the adjacent image signal track ③ and control is returned to step S101 after the sound receipt waiting mode is released (steps S157 and S159).

AV5-2: When Sound Receipt Starting Switch is turned ON and When Image Release is effected During or After Receipt of Sound Signals

When the image release switch 36b is turned ON during the receipt of the sound signals, it is assumed that new image signals are recorded. After the sound receipt is stopped, the image signals are recorded on the waiting image signal track ③ adjacent to the sound signal track ② and the received sound signals are recorded on the sound signal track ④ adjacent to the image signal track ③ (see AV5-2 in Fig. 6 and 5-2 in Fig. 7). Consequently, as can be seen in 5-2 in Fig. 7, since no signal is recorded on the sound signal track ② corresponding to the image signal track ① on which the image signals have been recorded, the sound signals can be later recorded on the blank sound signal track ②.

The above mentioned operation will be described below in more detail with reference to the flow charts. In the sound adaptor 200, the sound receipt commences upon operation of the sound receipt starting switch 52 and continues until the image release switch 36b is turned ON (steps S201 ~ S205, S239~ S247). When the image release switch 36b is turned ON before the sound receipt is completed, the sound receipt is stopped and the sound signals received up until then are output to the camera

body 100, and then, control is returned to step S201 (steps S245, S249~S257). If the image release switch 36b is not turned ON before the sound receipt is completed, the sound receipt is stopped and control waits for the operation of the release switch 36b or 53 (steps S243, S249~S253). If the image release switch 36b is turned ON, the received sound signals are output to the camera body 100, and thereafter, control is returned to step S201 (steps S251 and S257).

Concerning the camera body 100, when the image release switch 36b is turned ON, the system controller 23 checks the sound receipt (steps S139 and S161 ~ S165). If the sound signals are being received, the sound receipt is stopped. Thereafter, the magnetic head 15 is moved to the next image signal track ③ to record the image signals thereon (steps S167 and S169). Thereafter, the magnetic head 15 is moved to the sound signal track (sound signal recording track) ④ corresponding to the image signal track ③ to record thereon the sound signals sent from the sound adaptor 200 (steps S171, S173). After that, the magnetic head 15 is moved to the adjacent image signal track (image signal recording track) ⑤ and the indication of the sound receipt waiting mode stops. The control is then returned to step S101 (steps S175 and S177).

AV5-3: When Image Release Switch is turned ON Without making Sound Receipt Starting Switch ON

In this state, the magnetic head 15 is initially located above the sound signal track ② in a waiting position. In this position a sound signal is not recorded, but rather the magnetic head 15 is moved to the adjacent image signal track ③ to record thereon new image signals. Thereafter, the magnetic head 15 is moved to the sound signal track ④ adjacent and corresponding to the image signal track ③ and the mode becomes the sound receipt waiting mode (see AV5-3 in Fig. 6 and 5-3 in Fig. 7).

The detail of the above-mentioned operations will be discussed below with reference to the flow charts shown in Figs. 4 and 5.

The sound adaptor 200 repeats the loop of operations of steps S209 ~ S213.

On the camera body side, when the image release switch 36b is turned ON, the sound receipt is checked (steps S139, S161 ~ S165). Here, since the sound signals neither are being received nor have been completed, control proceeds to to step S 165 and then to step S179. Namely, the magnetic head 15 is moved to the next image signal track ③ to record thereon the image signals and is then moved to the corresponding sound signal track ④ adjacent thereto. Thereafter, control is returned to step S139 and

the mode becomes the sound receipt waiting mode (steps S139 ~ S143).

As can be seen from the foregoing, when the image is picked up without recording the sound, since no signal is recorded on the sound signal track ② corresponding to the image signal track ① on which the image signals by the first pickup are recorded, the sound signals can be recorded later on the sound signal track ②. Furthermore, the image pickup can be continued without releasing the AV mode and without effecting the sound releasing.

AV5-4: When Switch other than Sound Release Switch and Image Release Switch is actuated

When a switch other than the release switches 53 and 36b is turned ON, the magnetic head 15 is moved to the next track ③ and the sound receipt waiting mode is released (see AV5-4 in Fig. 6 and 5-4 in Fig. 7). The operation in accordance with the operation of the associated switch is performed. In the illustrated embodiment, when the up-switch 30 is turned ON, the magnetic head 15 is moved by one track, and the sound receipt waiting mode is released. Thereafter, control is returned to step S101 (steps S143~S147). Note that the sound receipt waiting mode is not always released by the operation of any switch other than the release switches 53 and 36b. For example, if the



photometering switch 36a which is actuated to take successive pictures in association with the image release switch 36b is turned ON, the sound receipt waiting mode is not released.

On the sound adaptor side, when the sound receipt waiting mode of the camera body 100 is released, the indication of the sound receipt waiting mode is stopped and control is returned to step S201 (steps S213 and S215).

In the sound receipt waiting mode mentioned above, "REC" and "AV", for example, in the LCD panel 37 of the camera body 100 blink, as shown in Fig. 8A, so that the operator is made aware of the sound receipt waiting mode. Similarly, in the LCD panel 56 of the sound adaptor 200, "REC" and "VIDEO" are lightened and "AUDIO" blinks, as shown in Fig. 8B.

As can be understood from the above discussion, with the present invention, the following operations which could not be effected in the prior art can be effectively carried out.

(1) The sound signals can be recorded at any time after the image signals are recorded, similar to a so-called "after-recording" process.

(2) Even in the sound receipt waiting mode after the recording of the image signals, when the photometering switch 36a is turned ON, new image signals and

corresponding sound signals can be recorded.

(3) During or after the receipt of sound signals after the recording of the image signals corresponding to the sound signals, the sound signals can be, independently of the image signals, recorded to correspond to the subsequent image signals to be recorded.

Although the above discussion has been directed to a recording apparatus having a single magnetic head, the present invention is not limited thereto and can be applied to a recording apparatus having two magnetic heads which can effect the tracking for the two adjacent tracks at one time. In this alternative, in the AV mode, one of the magnetic heads is used for recording the image signals and the other magnetic head is used for recording the sound signals, so that when the image release is effected after the sound signals are received, no movement of the magnetic heads is necessary. Furthermore, it is possible to simultaneously record the image signals and the sound signals without moving the magnetic heads by providing FM modulation circuits 19 for driving the respective magnetic heads and amplifiers 20.

As can be understood from the foregoing, with the present invention, when the image release is effected during the receipt of sound the AV mode, the receipt of sound is stopped, and the sound signals received

immediately before the image release are recorded after the image signals picked up at the image release are recorded, and accordingly, the sound signals are not subject to noise or voltage drop which would be produced upon the image releasing.

Furthermore, if the image release is effected before the sound signals are received, the image signals are recorded, and the mode is switched to a sound receipt waiting mode in which the received sound signals are recorded on the track of the magnetic disc corresponding to the image signals when the sound receipt starting switch is turned ON. Consequently, the necessary sound signals can be recorded any time after the image signals are recorded in the AV mode without modifying the mode.

Furthermore, if a switch other than the release switches is actuated in the sound receipt waiting mode, the operation of that switch has a priority. In this state, if the sound receipt waiting mode is released, the next image signals and sound signals can be recorded in the AV mode without changing the mode.

CLAIMS:

1. A recording method for an electronic still video apparatus in which when an image release operation is effected, image signals are picked up and recorded on a recording medium and when a sound receipt operation is effected, sound signals are received for a predetermined time, so that the received sound signals are recorded on the recording medium when a sound releasing operation is effected, the still video apparatus having an AV record mode in which the image signals and the sound signals are recorded on the recording medium in a corresponding manner, wherein the method comprises the recording of image signals prior to the sound signals in the AV record mode when the image release operation is effected.

2. A recording method according to claim 1, wherein when the image release operation is effected in the AV record mode during the receipt of the sound signals, the receipt of the sound signals is stopped, and then, the image signals are recorded on the recording medium.

3. A recording method according to claim 2, wherein the received sound signals are recorded on the recording medium after the image signals are recorded on the recording medium.

4. A recording method according to claim 1, wherein the received sound signals are recorded on the recording medium after the image signals are recorded on the recording medium in the AV record mode, even if the sound release operation is not effected, when the image release operation is effected after the receipt of sound signals is complete.

5. A recording method according to claim 1, wherein the image signals which have been picked-up are recorded on the recording medium and the apparatus is in a sound receipt standby mode when the image release operation is effected before the receipt of the sound signals starts in the AV record mode.

6. A recording method according to claim 5, wherein when the receipt of the sound signals commences in the sound receipt standby mode, the sound signals are receivable for a predetermined time.

7. A recording method according to claim 6, wherein when the sound release operation is effected during the receipt of the sound signals, the sound receipt is stopped, and the sound signals received before the stop of the sound receipt are recorded on the recording medium as sound signals corresponding to the image signals which have been recorded on the recording medium, so that the sound receipt standby mode is released.

8. A recording method according to claim 6, wherein when the sound release operation is effected after the completion of the receipt of the sound signals for said predetermined time, the received sound signals are recorded on the recording medium as sound signals corresponding to the image signals which have been recorded on the recording medium, so that the sound receipt standby mode is released.

9. A recording method according to claim 6, wherein when the image release operation is effected during the receipt of the sound signals, the sound receipt is stopped, and the image signals are picked-up and recorded on the recording medium and the received sound signals are recorded on the recording medium as sound signals corresponding to the most recently picked-up image signals, so the the sound receipt standby mode is released.

10. A recording method according to claim 6, wherein when the image release operation is effected after the completion of the receipt of the sound signals for said predetermined time, the image signals are picked-up and recorded on the recording medium and the received sound signals are recorded on the recording medium, so that the sound receipt standby mode is released.

11. A recording method according to claim 5, wherein when either the receipt of the sound signals commences, the sound release operation is effected, or the image release

operation is effected, the sound receipt standby mode is released.

12. A recording method according to any one of claims 5 to 11, wherein the still video apparatus comprises an indicating means for indicating the sound receipt standby mode.

13. A recording method according to any one of the preceding claims, wherein the still video apparatus comprises a camera body comprising an image pickup means including a zoom lens and an image sensor for converting an image of an object to be taken into electrical image signals and a recording means for recording the image signals and the sound signals on the recording medium, and a sound adaptor which is detachably attached to the camera body and which comprises a sound receiving means for receiving the sound signals.

14. A recording method according to claim 1, wherein the recording medium is a flexible magnetic disc.

15. A recording method according to claim 14, wherein the image signals and the sound signals are recorded on adjacent tracks of the flexible magnetic disc when the AV mode is selected.

16. A recording method according to claim 15, wherein one of the adjacent tracks is used to record the image signals and the other track is used to record the sound signals.

17. A recording method according to claim 15 or 16,

wherein a magnetic head is moved to the image signal recording track when the AV mode is selected.

18. A recording method according to claim 17, wherein when the image release operation is effected in the AV mode during the receipt of the sound signals, the receipt of the sound signals is stopped, and the image signals which have been picked-up are recorded on the image recording track of the flexible magnetic disc.

19. A recording method according to claim 18, wherein the magnetic head is moved to the sound recording track after the image signals are recorded on the corresponding image recording track of the magnetic disc to record the received sound signals thereon.

20. A recording method according to claim 19, wherein when the image release operation is effected in the AV record mode after the receipt of the sound signals is complete, the magnetic head is moved to the corresponding sound recording track after the most recently picked-up image signals are recorded on the image recording track, and the received sound signals are recorded on the sound recording track even if the sound release operation is not effected.

21. A recording method according to claim 20, wherein the magnetic head is moved to the next image recording track of the magnetic disc after the sound signals are recorded.



22. A recording method according to claim 17, wherein when the image release operation is effected in the AV record mode before the receipt of the sound signals commences, the image signals are picked-up and recorded on the image recording track of the magnetic disc, and the magnetic head is moved to the corresponding sound recording track to bring it to a sound receipt standby mode in which the magnetic head waits for the commencement of the receipt of the sound signals.

23. A recording method according to claim 22, wherein when the receipt of the sound signals commences in the sound receipt standby mode, the sound signals are received for a predetermined time.

24. A recording method according to claim 23, wherein when the sound release operation is effected during the receipt of the sound signals, the receipt of the sound signals is stopped, and the sound signals received up until then are recorded on the sound recording track as sound signals corresponding to the image signals recorded on the image signal recording track.

25. A recording method according to claim 24, wherein the magnetic head is moved to the next image recording track of the magnetic disc after the sound signals are recorded on the sound recording track.

26. A recording method according to claim 22, wherein

when the sound release operation is effected after the receipt of the sound signals for a predetermined time, the received sound signals are recorded on the sound recording track corresponding to the image recording track on which the image signals have been recorded and the sound receipt standby mode is released.

27. A recording method according to claim 22, wherein when the image release operation is effected during the receipt of the sound signals, the receipt of the sound signals is stopped, and the magnetic head is moved to the next image recording track to record thereon the image signals, and then, the magnetic head is moved to a sound signal recording track corresponding to the image recording track to record thereon the received sound signals as sound signals corresponding to the image signals recorded on the image recording track, so that the sound receipt standby mode is released.

28. A recording method according to claim 22, wherein when the image release operation is effected after the receipt of the sound signals is complete, the magnetic head is moved to the next image recording track to record thereon the image signals, and then, the magnetic head is moved to a sound signal recording track corresponding to the image signals of the previous image signal track, so that the sound receipt standby mode is released.

29. A recording method according to any one of claims 22 to 28, wherein when an operation other than the receipt of the sound signals, the sound release operation or the image release operation is effected in the sound receipt standby mode, the sound receipt standby mode is released.

30. A recording method according to claim 29, wherein when the sound receipt standby mode is released, the magnetic head is moved to a next track.

31. A recording method substantially as hereinbefore described with reference to the accompanying drawings.

**Patents Act 1977**  
**Examiner's report to the Comptroller under**  
**Section 17 (The Search Report)**

Application number

9124240.4

**Relevant Technical fields**

(i) UK CI (Edition K ) G5R (RAC, RB35, RGC, RHC, RHX) ;  
H4F (FDC, FDX, FAA)

(ii) Int CI (Edition 5 ) G11B

**Search Examiner**

A J RUDGE

**Databases (see over)**

(i) UK Patent Office

(ii) ONLINE DATABASES: WPI, INSPEC

**Date of Search**

17 FEBRUARY 1992

Documents considered relevant following a search in respect of claims

1-31

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	GB 2235846 A (ASAHI) eg Claim 1	1-31
X	GB 2235605 A (ASAHI) see whole document	1-31
X	GB 2223645 A (ASAHI) eg Claim 1	1-31
X	EP 0223423 A1 (SONY) eg page 1 line 29 et seq and Claims 7 and 9	1-31
X	EP 0127033 A1 (SONY) eg Claim 1	1-31

SF2(p)

sf - c:\wp51\doc99\fil001836

Category	Identity of document and relevant passages	Relevant to claim(s)

#### Categories of documents

**X:** Document indicating lack of novelty or of inventive step.

**Y:** Document indicating lack of inventive step if combined with one or more other documents of the same category.

**A:** Document indicating technological background and/or state of the art.

**P:** Document published on or after the declared priority date but before the filing date of the present application.

**E:** Patent document published on or after, but with priority date earlier than, the filing date of the present application.

**&:** Member of the same patent family, corresponding document.

**Databases:** The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**